

2865 1 2

AB

(19)  **Europäisches Patentamt**
European Patent Office
Office européen des brevets



(11) **EP 1 250 018 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
16.10.2002 Bulletin 2002/42

(51) Int Cl.7: **H04Q 7/24, H04J 14/02**

(21) Application number: **01926153.6**

(86) International application number:
PCT/JP01/03845

(22) Date of filing: **08.05.2001**

(87) International publication number:
WO 01/086982 (15.11.2001 Gazette 2001/46)

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

• **YOSHINO, Hitoshi**
Yokosuka-shi, Kanagawa 238-0026 (JP)
• **OTSU, Toru**
Yokohama-shi, Kanagawa 236-0057 (JP)
• **YAMAO, Yasushi**
Yokosuka-shi, Kanagawa 239-0822 (JP)

(30) Priority: **10.05.2000 JP 2000137879**
14.12.2000 JP 2000380882

(71) Applicant: **NTT DoCoMo, Inc.**
Tokyo 100-6150 (JP)


(74) Representative: **Rees, Alexander Ellison et al**
Urquhart-Dykes & Lord,
30 Welbeck Street
London W1G 8ER (GB)

(72) Inventors:
• **ABURAKAWA, Yuji**
Yokohama-shi, Kanagawa 235-0033 (JP)

(54) **WIRELESS BASE STATION NETWORK SYSTEM, CONTROL STATION, BASE STATION SWITCHING METHOD, SIGNAL PROCESSING METHOD, AND HANDOVER CONTROL METHOD**

(57) The present invention is a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers using a wavelength multiplexing transmission method, wherein: the base station comprises a variable-wavelength transmitter for transmitting an optical signal having a predetermined wavelength, and an optical coupler for combining optical signals from the variable-wavelength transmitter in order to transmit the optical signals using the wavelength multiplexing transmission method, the control station comprises a plurality of optical receivers for receiving wavelengths of the optical signals transmitted using the wavelength multiplexing transmission method, and an optical coupler for splitting the wavelength-multiplexed optical signals transmitted from the base stations into the optical receivers by wavelength, and when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal controls the wavelength of the variable-wavelength transmitter, and then transmits the optical signals to the control station with the same wavelength as one used for transmitting by a previous base station which com-

municates with the radio communication terminal before the movement.

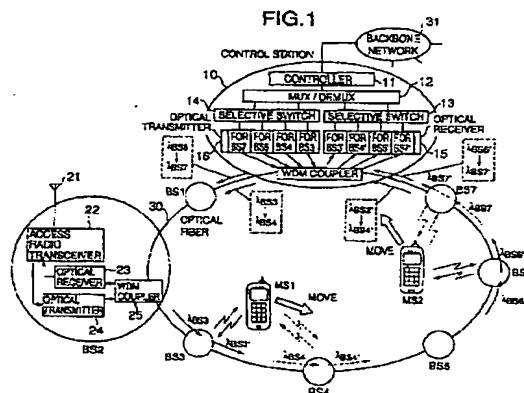

BEST AVAILABLE COPY

Description

TECHNICAL FIELD

[0001] The present invention relates to a radio communication system, more particularly, to a network system of radio base stations and the method for switching base stations, in which a base station provided in each of a plurality of cells and a control station that controls the base stations are connected by optical fibers using a wavelength multiplexing transmission or a sub-carrier optical transmission method.

[0002] The present invention also relates to a system in which a control station receives signals from a plurality of base stations and equalizes those signals, which control station controls a communication network including the base stations, and which signals are sent to a plurality of base stations by a mobile station under handover.

BACKGROUND ART

[0003] In a network of radio base stations to which optical wavelength division multiplexing (WDM) is applied for example, there are generally provided with a plurality of base stations that communicate with radio communication terminals, and a control station that comprehensively controls the plurality of base stations and communicates with external communication networks, wherein those stations are connected by optical fiber lines.

[0004] A conventional base station converts a signal received from a radio communication terminal into an optical signal having a wavelength specific for the base station in order to transmit the optical signal to the control station via the optical fiber lines.

[0005] Therefore, the control station has an optical receiving device that can support a plurality of wavelengths the number of which wavelengths equals to the number of the base stations in the network. This optical receiving device includes a plurality of optical receivers wherein each of the plurality of optical receivers can support a single wavelength. Each of these optical receivers is responsible for receiving optical signals from a single base station and converting the received optical signals into electrical signals. The converted signals are switched by a selection switch, to become received electrical signals.

[0006] That is, when a mobile station moves to another cell, the control station has to switch the selection switch into another optical receiver in order to continue receiving from that mobile station.

[0007] The conventional WDM-applied network of radio base stations is described hereinafter with reference to Figs.1 and 2. Fig.1 is a block diagram showing an example of a configuration of the conventional network system of radio base stations.

[0008] A control station 10 and base stations (BS1-7, hereinafter referred to as "BS", the number of which

base stations is not limited to 7) are connected into a loop structure by optical fibers 30 in which optical signals are transmitted and received by using a wavelength multiplexing transmission method.

5 [0009] In this configuration, when the control station 10 transmits an optical signal to each BS, since a different wavelength for receiving is assigned to each BS, and optical transmitter 16 for transmitting a wavelength specific for each BS is provided in the control station 10, each optical signal is combined for wavelength multiplexing transmission and is transmitted by a WDM coupler 17.

10 [0010] In each of the BS1-7, an optical signal having a wavelength specific for each BS is split off by each WDM coupler 25, and is received by an optical receiver 23. Signals from the optical receiver 23 are radio-transmitted to radio communication terminals (MS1 and MS2, hereinafter referred to as "MS", the number of which terminals is not limited to 2) via an antenna 21 by an access radio (radio communication between the BS and the radio communication terminal) transceiver 22.

15 [0011] A radio signal from the MS is received by the access radio transceiver 22 via the antenna 21, is converted into an optical signal by an optical transmitter 24, and is then combined by the WDM coupler 25 for wavelength multiplexing transmission.

20 [0012] The access radio transceiver 22 in the BS is provided with a radio signal demodulator for mobile communications that demodulates and converts the received signals from the MS into digital signals, and a radio signal modulator for mobile communications that converts digital signals outputted from the optical receiver 23 into signals having radio frequencies for mobile communication.

25 [0013] In the control station 10, the optical signals from each BS are split off into single-wavelength signals by the WDM coupler 17, and are then received by the optical receiver 15.

30 [0014] When, for example, the MS1 is communicating with an MS3, the control station uses a wavelength λ_{BS3} for transmitting signals to the BS3, and the BS3 uses a wavelength λ_{BS3} for transmitting signals to the control station.

35 [0015] Then, when the MS moves and commences to communicate with the BS4, in the control station 10, the selection switch 14 is operated such that an optical transmitter for the wavelength λ_{BS3} of the BS3 is switched into an optical transmitter for a wavelength λ_{BS4} of the BS4, and the control station 10 uses the wavelength λ_{BS4} for transmitting signals to the BS4. At the same time, the BS4 uses the wavelength λ_{BS4} for transmitting signals to the control station. Since a wavelength used for signals to the control station is consequently switched from the wavelength λ_{BS3} into λ_{BS4} , the control station 10 switches a receiving optical receiver into one for the wavelength λ_{BS4} by the selection switch 13 in order to receive the signals, whereby the MS and the control station can continue communicating.

[0016] Fig.2 is a diagram showing an example of the WDM coupler in the conventional control station.

[0017] Signals from the optical transmitters for each wavelength are inputted to a WDM coupler 17₁, are combined for wavelength multiplexing, and are then transmitted to each BS.

[0018] Therefore, when a transmitting BS is switched from the BS3 to the BS4, the optical transmitter is accordingly switched from one for λ_{BS3} to another for λ_{BS4} .

[0019] At the same time, in a WDM coupler 17₂, optical signals having wavelengths λ_{BS1} - λ_{BSN} from each BS are split off by wavelength into different terminals, and are respectively received by the optical receiver.

[0020] Therefore, when a receiving BS is switched from the BS3 to the BS4, the optical receiver is then switched by the selection switch, since it is necessary for an output terminal to be switched from one for λ_{BS3} to another for λ_{BS4} .

[0021] However, when switching of base stations due to the movement of the radio communication terminals is required frequently, there appears a problem in that, in the control station, the workload for performing selective combination such as one in the selection switches of each optical transceiver becomes excessive so that the processing requirement of the control station becomes too high.

DISCLOSURE OF THE INVENTION

[0022] Therefore, the general object of the present invention is to provide a novel and advantageous network system of radio base stations, which can resolve the above-mentioned problem that the prior art has.

[0023] The detailed object of the present invention is to provide an effective network system of radio base stations and the method for switching of base stations that can reduce processing load in a control station even when switching of base stations occurs due to the movement of radio communication terminals.

[0024] These objects are achieved by a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers with a wavelength multiplexing transmission, wherein: the base station comprises a variable-wavelength transmitter for transmitting an optical signal having a predetermined wavelength, and an optical coupler for combining optical signals from the variable-wavelength transmitter in order to transmit the optical signals by using wavelength multiplexing transmission; the control station comprises a plurality of optical receivers for receiving wavelengths of the optical signals transmitted using a wavelength multiplexing transmission method, and an optical coupler for splitting the wavelength-multiplexed optical signals transmitted from the base stations into the optical receivers by wavelength, and when the radio

communication terminal communicating with the base station moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal controls the wavelength of the variable-wavelength transmitter, and then transmits the optical signals to the control station using the same wavelength as the one used for transmitting by a previous base station which communicates with the radio communication terminal before the movement.

[0025] Although the coupler may be a WDM coupler in this context, any other devices capable of combining and splitting off optical signals by wavelength can be employed.

[0026] Another object of the present invention is to increase the quality of communication in a mobile station performing soft handover in the above-mentioned radio communication network system.

[0027] This object is achieved by a network system of radio base stations comprising a plurality of base stations communicating with radio communication terminals, a control station comprehensively controlling the base stations and communicating with an external communication network, and optical fiber lines connecting the base stations and the control station, in which each of the base stations receives signals transmitted by the radio communication terminal, converts the received signals into optical signals, and then transmits the converted optical signals to the control station via the optical fiber lines, wherein: each of the base stations comprises a signal converting part for converting signals transmitted from the radio communication terminal into optical signals having different wavelengths as assigned specifically to each of the sending radio communication terminals, and the control station comprises an optical signal receiving part for receiving via the optical fiber lines simultaneously optical signals having an identical wavelength to the wavelength assigned to the originating radio communication terminal that are converted respectively by the signal converting part from signals transmitted from a single radio communication terminal and received by at least two base stations, and for converting the received signals into electric signals to be output, and an equalizing part for equalizing the output signals.

[0028] Other objects, features, and advantages of the present invention are elucidated in the following detailed description with reference to the accompanied figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029]

Fig.1 is a diagram partially showing a schematic of a conventional network system of radio base stations;

Fig.2 is a diagram showing an example of a WDM coupler of a control station in the conventional system;

Fig.3 is a diagram partially showing a schematic of a radio communication system according to a first embodiment of the present invention;

Fig.4 is a diagram showing an example of a WDM coupler of a control station in the first embodiment;

Fig.5 is a diagram partially showing a schematic of a radio communication system according to a second embodiment of the present invention;

Fig.6 is a diagram showing an example of a WDM coupler of a BS in the second embodiment of the present invention;

Fig.7 is a diagram partially showing a schematic of a radio communication system according to a third embodiment of the present invention;

Fig.8 is a diagram showing an example of a WDM coupler of a BS in the third embodiment of the present invention;

Fig.9 is a diagram partially showing a schematic of a radio communication system according to a fourth embodiment of the present invention;

Fig.10 is a diagram partially showing a schematic of a radio communication system according to a fifth embodiment of the present invention;

Fig.11 is a diagram partially showing a schematic of a radio communication system according to a sixth embodiment of the present invention;

Fig.12 is a diagram partially showing a schematic of a radio communication system according to a seventh embodiment of the present invention;

Fig.13 is a diagram partially showing a schematic of a radio communication system according to the seventh embodiment of the present invention;

Fig.14 is a diagram partially showing a schematic of a radio communication system according to an eighth embodiment of the present invention;

Fig.15 is a schematic diagram to explain a time difference that may cause interference, in case of providing no diversity equalizing parts in the control station;

Fig.16 is a diagram partially showing a schematic of a radio communication system according to a ninth embodiment of the present invention;

Fig.17 is a diagram partially showing a schematic of a radio communication system according to a tenth embodiment of the present invention;

Fig.18 is a diagram showing the case in which plural base stations are connected into a mesh structure;

Fig.19 is a diagram showing the case in which plural base stations are connected into a cluster structure.

PREFERRED EMBODIMENTS FOR CARRYING OUT THE INVENTION

[0030] Embodiments of the present invention are described hereinafter with reference to figures.

[0031] A first embodiment of the present invention is described with reference to Figs.3 and 4.

[0032] Fig.3 is a diagram partially showing a schematic

ic of a radio communication system according to the first embodiment of the present invention.

[0033] A control station 40 and base stations (BS) are connected in a loop structure by optical fibers in which optical signals are transmitted and received using a wavelength multiplexing transmission method.

[0034] In the control station 40, a variable-wavelength light source 44 is provided as an optical transmitter for transmitting each optical wavelength, and each optical signal is combined for wavelength multiplexing transmission and is transmitted to the BS by a WDM coupler 45.

[0035] In each of the base stations BS1-7, a WDM coupler 55 splits off a wavelength specific for each base station from others, and an optical receiver 53 then receives the split off wavelength. Signals from the optical receiver 53 are radio-transmitted to radio communication terminals (MS) via an antenna 51 by an access radio (radio communication between the BS and the radio communication terminal) transceiver 52. Radio signals from the radio communication terminal are received by the access radio transceiver 52 via the antenna 51, are converted into optical signals having an arbitrary wavelength by a variable-wavelength light source 54, and are then combined by the WDM coupler 55 for wavelength multiplexing transmission to the control station 40.

[0036] In the control station 40, optical signals from each BS are split off into single-wavelength signals by the WDM coupler 45, and then respectively received by an optical receiver 43.

[0037] When the MS1 is communicating with the BS3, the BS3 uses a wavelength λ_{MS1} for transmitting the received information from the MS1 to the control station. Then, when the MS1 moves and commences to communicate with the BS4, since the BS4 changes an output wavelength of the variable-wavelength light source 54 into the wavelength λ_{MS1} , and transmits signals thereafter, the control station 40 can continue receiving signals having the wavelength λ_{MS1} without any switching operation. The MS1 thus achieves a switching of base stations from the BS3 to the BS4.

[0038] Fig.4 is a diagram showing an example of the WDM coupler in the control station according to the first embodiment.

[0039] In a WDM coupler 45₂, signals having wavelengths λ_{MS1} - λ_{MSN} received from each BS are split off and distributed into different terminals by wavelength, and then respectively received by the optical receiver 43.

[0040] In this embodiment, therefore, when the switching of base stations occurs due to a movement of the MS, since, in respect of this MS, the wavelength of optical signals from the BS is not changed, and in the control station, the optical signals are outputted from the identical terminal, the control station can continue to receive these optical signals with the identical optical receiver 43 and can dispense with any switching operations.

[0041] A second embodiment of the present invention is described with reference to Figs.5 and 6.

[0042] Fig.5 is a diagram partially showing a schematic of a radio communication system according to the second embodiment of the present invention.

[0043] A control station 60 and base stations (BS) are connected in a loop structure by the optical fibers 30.

[0044] In the control station 60, there is provided a variable-wavelength light source 64 that can vary a wavelength for transmission, and each optical signal is combined for wavelength multiplexing transmission and is then transmitted to the BS by a WDM coupler 65.

[0045] In each of base stations BS1-7, a WDM coupler 75 splits off a wavelength specific for each base station from others, and an optical receiver 73 then receives the split off wavelength. Signals from the optical receiver 73 are radio-transmitted to radio communication terminals (MS) via an antenna 71 by an access radio transceiver 72. Radio signals from the radio communication terminal are received by the access radio transceiver 72 via the antenna 71, are converted into optical signals having an arbitrary wavelength by a variable-wavelength light source 74, and are then combined by the WDM coupler 75 for wavelength multiplexing transmission.

[0046] In the control station 60, optical signals from each BS are split off into single-wavelength signals by the WDM coupler 65, and are then received by an optical receiver 63.

[0047] When the MS1 is communicating with the BS3, communication information is transmitted from the control station 60 to the BS3 with a wavelength λ_{BS3} . Then, when the MS moves and commences to communicate with the BS4, the control station 60 achieves a switching of base stations by changing a wavelength of the variable-wavelength light source from λ_{BS3} to λ_{BS4} and then transmitting with the wavelength λ_{BS4} . The control station 80 thus achieves the switching of BS by merely controlling the wavelength of the variable-wavelength light source.

[0048] Fig.6 is a diagram showing an example of the WDM coupler in the BS according to the second embodiment.

[0049] In a WDM coupler 75₁, among signals having wavelengths λ_{BS1} - λ_{BSN} received from the control station 60 or the other BS, only optical signals having a wavelength that is a specific wavelength λ_{BSM} assigned for that BS are split off and others are to be passed through. Signals from the variable-wavelength light source in BS are combined for wavelength multiplexing transmission.

[0050] Therefore, when the MS1 switches a base station to be communicated with from the BS3 to the BS4, the control station 60 changes the wavelength of the variable-wavelength light source from λ_{BS3} to λ_{BS4} for transmission of information of that communication, and then transmits signals with the wavelength λ_{BS4} in order to achieve a switching of BS.

[0051] A third embodiment of the present invention is described with reference to Figs.7 and 8.

[0052] Fig.7 is a diagram partially showing a schematic of a radio communication system according to the third embodiment of the present invention.

[0053] A control station 80 and base stations (BS) are connected in a loop structure by the optical fibers 30 in which optical signals are transmitted and received using the wavelength multiplexing transmission method.

[0054] In the control station 80, there is provided with an optical transmitter 84 that transmits each optical wavelength, and each optical signal is combined for wavelength multiplexing transmission and is then transmitted to the BS by a WDM coupler 85.

[0055] The light sources for transmission in the optical transmitter 84 are here provided for each MS. For example, when the MS1 commences to communicate with the BS3, a wavelength of the light source for transmission in the MS1 is set to the wavelength λ_{BS3} .

[0056] In each of BS1-7, a variable WDM coupler 95 splits off an optical signal having an arbitrary wavelength from others, and an optical receiver 93 then receives the optical signal. Signals from the optical receiver 93 are radio-transmitted to radio communication terminals (MS) via an antenna 91 by an access radio transceiver 92.

[0057] Radio signals from the radio communication terminal are received by the access radio transceiver 92 via the antenna 91, are converted into optical signals having a predetermined wavelength by a variable-wavelength light source 94, and are then combined by the WDM coupler 95 for wavelength multiplexing transmission. The variable-wavelength light source 94 is a light source that can optionally control a wavelength outputted from the light source.

[0058] In the control station 80, optical signals from each BS are split off into single-wavelength signals by the WDM coupler 85, and are then received by an optical receiver 83.

[0059] When the MS1 is communicating with the BS3, communication information is transmitted from the control station to the BS3 with the wavelength λ_{BS3} . Then, when the MS moves and commences to communicate with the BS4, the control station 80 does not change a wavelength for transmission intended for use by the BS. That is, even when the radio communication terminal changes the base station to be communicated with, the control station still uses the wavelength λ_{BS3} that is the wavelength of optical signals intended for use by the base station which communicates with the MS before the movement of the MS.

[0060] At the same time, the BS4 splits off signals intended for the MS1 transmitted from the control station 80 with the wavelength λ_{BS3} , from other signals by the variable WDM coupler 85, receives them with the optical receiver 93, and then radio-transmits them to the MS1 via the antenna 91 by the access radio transceiver 92.

[0061] Thus, the control station 80 can continue com-

municating with the MS1 without switching an optical transmitter or any other operation of controlling wavelengths, and can achieve a switching of BS.

[0062] Fig.8 is a diagram showing an example of the WDM coupler in BS according to the third embodiment.

[0063] In a WDM coupler 95₁, among optical signals having wavelengths λ_{BS1} - λ_{BSN} received from the control station 80 or the other BS, only predetermined optical signals having a wavelength λ_{BSM} are split off, and the others are to be passed through. Signals from the variable-wavelength light source 94 in the BS are combined by a WDM coupler 95₂ for wavelength multiplexing transmission.

[0064] Therefore, when the MS1 switches a base station to be communicated with from the BS3 to the BS4, the wavelength split off by the variable WDM coupler in the BS4 is changed into the wavelength λ_{BS3} , whereby optical signals from the control station 80 are transmitted to the BS4 so that a switching of BS is achieved.

[0065] A fourth embodiment of the present invention is described with reference to Fig.9.

[0066] Fig.9 is a diagram partially showing a schematic of a radio communication system according to the fourth embodiment of the present invention.

[0067] A control station 100 and base stations (BS) are connected in a loop structure by the optical fibers 30.

[0068] In the control station 100, signals that are split off by an MUX/DEMUX 102 are converted into entrance radio signals by a variable-frequency entrance MOD 104, are frequency-multiplexed by a selective-frequency coupler 105, and are then transmitted to the BS by an E/O 106 using the sub-carrier transmission method.

[0069] In each of BS1-7, the transmitted signals are converted into frequency-multiplexed radio signals by each O/E 115, and a predetermined entrance radio frequency signal is split off from the frequency-multiplexed radio signals by a selective-frequency coupler 114. The signal split off is demodulated by a variable-frequency entrance DEM 113₁ (here, a variable-frequency entrance MODEM 113 includes the variable-frequency entrance DEM 113₁ for demodulating and a variable-frequency entrance MOD 113₂ for modulating). Digital signals demodulated by the variable-frequency entrance MOD 113₁ are converted into radio frequency signals intended for the radio communication terminals and are then radio-transmitted to the radio communication terminal (MS) via an antenna 111 by an access radio transceiver 112.

[0070] Radio signals from the radio communication terminal are received by the access radio transceiver 112 via the antenna 111, and are then converted into digital signals. The digital signals are then converted into the entrance radio signals having a frequency f_{MS1} by the variable-frequency entrance MOD 113₂. The output signals are multiplexed by the selective-frequency coupler 114 and are then transmitted to the control station or the other BS by an E/O 116 on the sub-carrier transmission.

[0071] In the control station 100, optical signals from each BS are converted into frequency-multiplexed radio signals by the O/E 107. The converted signals are split off into single-wavelength signals by the selective-frequency coupler 105. Each single-wavelength signal is demodulated into a digital signal by the variable-frequency entrance DEM 103.

[0072] When the MS1 is communicating with the BS3, the BS3 modulates information from the MS1 with a variable-frequency entrance radio signal having the frequency f_{MS1} , and then transmits the modulated signal to the control station 100 on the sub-carrier transmission.

[0073] Then, when the MS1 moves and commences to communicate with the BS4, the BS4 controls a carrier (that is the entrance radio frequency) of the variable-frequency entrance MOD 113₂, modulates information from the MS1 with the entrance radio frequency having the frequency f_{MS1} , and then transmits the modulated signal to the control station 100 on the sub-carrier optical transmission. The control station 100 still uses the same entrance radio frequency f_{MS1} for receiving, whereby the control station can continue receiving the signals from the MS1.

[0074] The switching of base stations from the BS3 to the BS4 in respect of the MS1 is thus achieved.

[0075] A fifth embodiment of the present invention is described with reference to Fig.10.

[0076] Fig.10 is a diagram partially showing a schematic of a radio communication system according to the fifth embodiment of the present invention.

[0077] A control station 120 and base stations (BS) are connected in a loop structure by the optical fibers 30.

[0078] In the control station 120, signals that are split off by an MUX/DEMUX 122 are modulated into entrance radio signals (with frequencies f_{BS1} - f_{BSN}) by a variable-frequency entrance MOD 124, are frequency-multiplexed by a selective-frequency coupler 125, and are then transmitted to each BS by an E/O 126 using the sub-carrier transmission method.

[0079] In each of BS1-7, the transmitted signals are converted into frequency-multiplexed radio signals by each O/E 135, and a signal having a frequency specific for each BS is split off from the converted signals by a selective-frequency coupler 114. The signal split off is demodulated by a variable-frequency entrance DEM 133₁ (here, a variable-frequency entrance MODEM 133 includes the variable-frequency entrance DEM 133₁ for demodulating and a variable-frequency entrance MOD 133₂ for modulating). Digital signals demodulated by the variable-frequency entrance DEM 113₁ are radio-transmitted to the radio communication terminal (MS) via an antenna 131 by an access radio transceiver 132. Radio signals from the radio communication terminal are received by the access radio transceiver 132 via the antenna 131, and are then converted into digital signals. The digital signals are then modulated into the entrance radio signals by the variable-frequency entrance MOD

133₂. The output signals are frequency-multiplexed by the selective-frequency coupler 134, and are then transmitted to the control station 120 or the other BS by an E/O 127 using the sub-carrier transmission method.

[0080] In the control station 120, optical signals from each BS are converted into frequency-multiplexed radio signals by the O/E 127. The converted signals are split off into single-wavelength signals by the selective-frequency coupler 125. Each single-wavelength signal is demodulated into a digital signal by the variable-frequency entrance DEM 123.

[0081] When the MS1 is communicating with the BS3, the control station 120 modulates the information with an entrance radio signal having the frequency f_{BS3} , and then transmits the modulated signal to the BS3 on the sub-carrier transmission.

[0082] Then, when the MS1 moves and commences to communicate with the BS4, the control station 120 controls a carrier (that is the entrance radio frequency) of the variable-frequency entrance MOD 124, converts the entrance radio frequency having the frequency f_{BS3} into the entrance radio frequency having the frequency f_{BS4} , and then transmits the converted signal to the BS4 using the sub-carrier optical transmission method. Thus, the control station 120 controls a carrier of the variable-frequency entrance MOD 124 so that the control station can change a destination of signals from the BS3 to the BS4, that is, the switching of base stations is achieved.

[0083] A sixth embodiment of the present invention is described with reference to Fig.11.

[0084] Fig.11 is a diagram partially showing a schematic of a radio communication system according to the sixth embodiment of the present invention.

[0085] A control station 140 and base stations (BS) are connected into a loop structure by the optical fibers 30.

[0086] In the control station 140, signals that are split off by an MUX/DEMUX 142 are modulated into entrance radio signals (with frequencies f_{BS1} - f_{BSN}) by a variable-frequency entrance MOD 144, are frequency-multiplexed by a selective-frequency coupler 145, and are then transmitted to each BS by an E/O 146 using the sub-carrier transmission method.

[0087] In each of BS1-7, the transmitted signals are converted into frequency-multiplexed radio signals by each O/E 155, and a signal having a predetermined frequency is split off from the converted signals by a selective-frequency coupler 154. The signal split off is demodulated by a variable-frequency entrance DEM 153₁ (here, a variable-frequency entrance MODEM 153 includes the variable-frequency entrance DEM 153₁ for demodulating and a variable-frequency entrance MOD 153₂ for modulating). Digital signals demodulated by the variable-frequency entrance DEM 153₁ are radio-transmitted to a radio communication terminal (MS) via an antenna 151 by an access radio transceiver 152.

[0088] Radio signals from the radio communication

terminal are received by the access radio transceiver 152 via the antenna 151, and are then converted into digital signals. The digital signals are then converted into the entrance radio signals by the variable-frequency entrance MOD 153₂. The output signals are multiplexed by the selective-frequency coupler 154, and are then transmitted to the control station 120 or the other BS by an E/O 156 on the sub-carrier transmission.

[0089] In the control station 140, optical signals from each BS are converted into frequency-multiplexed radio signals by the O/E 147. The converted signals are split off into single-wavelength signals by the selective-frequency coupler 145. Each single-wavelength signal is demodulated into a digital signal by the variable-frequency entrance DEM 143.

[0090] When the MS1 is communicating with the BS3, the control station 140 modulates the information with an entrance radio signal having the frequency f_{BS3} , and then transmits the modulated signal to the BS3 on the sub-carrier transmission.

[0091] Then, even when the MS1 moves and commences to communicate with the BS4, the control station 140 still uses the entrance radio frequency having the frequency f_{BS3} for transmitting using the sub-carrier optical transmission method. At the same time, the BS4 controls the variable selective-frequency coupler 154 such that the BS4 uses the frequency f_{BS3} for splitting off, and then receives the entrance radio signal having the frequency f_{BS3} from the control station 140. Thus, without any operation on switching of frequencies, the control station can change the destination of signals from the BS3 to the BS4, and the switching of BS is achieved.

[0092] A seventh embodiment of the present invention is described with reference to Figs. 12 and 13.

[0093] Figs.12 and 13 are diagrams partially showing schematics of a radio communication system according to the seventh embodiment of the present invention.

[0094] This embodiment shows the case that the radio communication terminal moves from the Cluster 1 to the Cluster 2 over the communication network organized into a cluster structure, and Figs.12 and 13 show the aspects of uplink and downlink controls, respectively.

[0095] In Fig.12, when the MS1 is communicating with the BS6, the BS6 transmits information from the MS1 to a cluster control station 1 with the wavelength λ_{MS1} .

[0096] Then, when the MS1 moves and changes a cluster in order to commence to communicate with the BS2, in this embodiment, the cluster control station 1 in the Cluster 1 then transmits signals sent from the MS1 and intended for the cluster control station 2 in the Cluster 2 to the control station 160 with the same wavelength λ_{MS1} as one used by the BS6 for transmitting before the movement of the MS1.

[0097] When the wavelength λ_{MS1} is not being used in the Cluster 2, the control station 160 then relays and transmits signals sent from the MS1 and carried on the

wavelength λ_{MS1} from the cluster control station 1 to the cluster control station 2 without converting of wavelengths.

[0098] When the wavelength λ_{MS1} is being used in the Cluster 2, the control station 160 then converts the wavelength λ_{MS1} sent from the cluster control station 1 into a wavelength $\lambda_{MS1'}$ that is not used in the Cluster 2, and then transmits the converted signals to the cluster control station 2.

[0099] Then, in the Cluster 2 that the MS1 moves into, the BS2 transmits signals sent from the MS1 to the cluster control station 2 with the same wavelength λ_{MS1} as one used by the BS6 in Cluster 1 for transmitting to the cluster control station 1 before the movement of the MS1. In the case that the wavelength λ_{MS1} is being used in the Cluster 2, the BS2 in the Cluster 2 transmits the signals to the cluster control station 2 with the wavelength $\lambda_{MS1'}$ that is not being used in the Cluster 2.

[0100] The radio communication terminal can thus switch of clusters and of base stations, with achieve a seamless handover between clusters.

[0101] In Fig. 13, when the MS1 is communicating with the BS6 in the Cluster 1, the BS6 receives information from the cluster control station 1 with the wavelength λ_{MS1} .

[0102] Then, when the MS1 moves and changes a cluster in order to commence to communicate with the BS2 in the Cluster 2, in this embodiment, the cluster control station 1 in the Cluster 1 then transmits signals intended for the MS1 to the BS2 in the Cluster 2 via the control station 160 with the same wavelength λ_{MS1} as one used by the cluster control station 1 for transmitting to the BS6 before the movement of the MS1.

[0103] When the wavelength λ_{MS1} is not being used in the Cluster 2, the control station 160 then relays and transmits signals sent from MS1 and carried on the wavelength λ_{MS1} from the cluster control station 1 to the cluster control station 2 without converting of wavelengths.

[0104] When the wavelength λ_{MS1} is being used in the Cluster 2, the control station 160 then converts the wavelength λ_{MS1} sent from the cluster control station 1 into the wavelength $\lambda_{MS1'}$ that is not being used in the Cluster 2, and then transmits the converted signals to the cluster control station 2.

[0105] The cluster control station 2 then transmits signals intended for the MS1 with the wavelength λ_{MS1} or $\lambda_{MS1'}$ to the BS2 with which the MS1 is currently communicating. The BS2 then converts the received signals into signals having the access radio (a radio communication between the BS and the radio communication terminal) frequency, and then radio-transmits the converted signals to the MS1.

[0106] The radio communication terminal can thus switch of clusters and of base stations, with a seamless handover between clusters.

[0107] Although, in the context of the above-mentioned embodiments 1-7, the WDM couplers are de-

scribed to include a coupler for combining and a coupler for splitting off in some cases (for example, Fig.4, Fig. 6, and Fig.8), it is an exemplified description to emphasize a function to combine and a function to split off, and a single WDM coupler provided with these two functions can be employed.

[0108] Also, a plurality of base stations and a control station that controls the plurality of base stations may be connected with the sub-carrier optical transmission with the radio signals for mobile communication instead of the entrance radio signals.

[0109] As described above, according to the embodiments 1-7 of the present invention, in the network system of radio base stations in which the plurality of base stations and the control station that controls those base stations are connected using the wavelength multiplexing transmission method, a wavelength is assigned to a communication between the base station and the radio communication terminal, and when the mobile terminal moves and the switching of base stations arises, wavelengths used for transmission of information in base stations and control stations are controlled so that the control station can dispense with any operation of switching, resulting in a simplified control operation.

[0110] Also, by applying sub-carrier optical transmission to control frequencies of sub-carriers on this network system of radio base stations, the same effect is obtained.

[0111] Further, by applying these embodiments of the present invention to a network organized into a cluster structure, a highly scalable network system of radio base stations is achieved, and the radio communication terminals can roam among the clusters.

[0112] An eighth embodiment of the present invention is described with reference to Figs.14 and 15. Fig.14 is a diagram partially showing a schematic of a radio communication system according to the eighth embodiment of the present invention.

[0113] During performing soft handover, a signal sent from a single mobile station is converted into two respective optical signals independently at two base stations. The control station receives and monitors those two optical signals in order to achieve handover. According to the above-mentioned embodiments 1-7, although these two optical signals arrive at the control station 201 at different times depending on at which base station they are converted, these two optical signals are received at the same receiver in the control station since they have the same wavelength. This might cause interference between these signals and make it difficult to establish communications. In this embodiment, therefore, a process of equalization is performed in a subsequent stage of the optical receiving device.

[0114] In Fig.14, a control station 201 and a plurality of base stations (referred to as BS1-BS7 hereinafter, as an example) are connected in a loop structure by optical fiber cables. The WDM is applied here, for example. The base station is provided in each cell and controls radio

communications with radio communication terminals that are located within each cell. Any type of optical fibers or any optical fibers with arbitrary performance may be used, and any interval between base stations may be employed. Also, it is assumed that the control station and each base station mutually communicate in optical signals using the wavelength multiplexing transmission method.

[0115] The control station 201 includes a controller 202, an MUX/DEMUX 203, a variable-wavelength light source 204, a WDM coupler 205, an optical receiving device 206, and a diversity equalizer 207.

[0116] The controller 202 controls communications between the network of the base stations (BS1-BS7) that are managed by the control station 201 and the external communication network (that is the backbone network).

[0117] The MUX/DEMUX 203 splits off multiplexed signals received from the backbone network, and multiplexes signals to be transmitted to the backbone network.

[0118] The variable-wavelength light source 204 (supporting N types of wavelengths 1-N) converts an electric signal to be transmitted into an optical signal having a wavelength specific for each destination mobile station. It is here assumed that a single wavelength is assigned to each mobile station, and the variable-wavelength light source is also provided to accommodate each wavelength, that is, the variable-wavelength light source is provided to meet the supposed maximum number of mobile stations that can be accepted.

[0119] The WDM coupler 205 combines optical signals to be transmitted having different wavelengths, and splits off a received combined optical signal into single-wavelength optical signals split off by wavelength.

[0120] The optical receiving device 206 that includes a plurality of optical receivers receives and converts the single-wavelength optical signals split off by wavelength into electric signals. It is here assumed that a single wavelength is assigned to each mobile station, and the optical receiving device is also provided for each wavelength, that is, the optical receiving device is provided to meet the supposed maximum number of mobile stations that can be accepted. In other words, optical signals that are converted from signals transmitted from an identical mobile station are converted into electric signals by an identical receiver, irrespective of which base station transmits each of those optical signals.

[0121] The diversity equalizer 207 is provided subsequently to the optical receiving device 206. Among signals received and converted into electric signals, the diversity equalizer 207 combines only signals that are sent from an identical mobile station, that is, that have the same wavelength at the input stage of the control station 201, in order to equalize the received signals having arrived at different times.

[0122] Taking the base station BS2 as an example, a configuration of each base station is then described. It

is assumed that every base station has the same configuration. Each base station has a WDM coupler 208, an optical receiver 209, an access radio transceiver 210, an antenna 211, a radio transceiver 212, an access MODEM 213, and a variable-wavelength light source 214.

[0123] The WDM coupler 208 splits off and takes in an optical signal having a wavelength specific for the base station among the combined optical signals transmitted from the control station 201, and combines optical signals to be transmitted to the control station 201.

[0124] The optical receiver 209 receives optical signals taken into by the WDM coupler 208, and then converts them into electric signals.

[0125] The access radio transceiver 210 includes a radio transceiver 212 radio-communicating with the mobile stations via the antenna 211, and an access MODEM 213 modulating and demodulating the received signals and the signals to be transmitted.

[0126] The variable-wavelength light source 214 receives electric signals received from the mobile station and then converts them into optical signals having a wavelength specific for that mobile station.

[0127] Before describing the operation of the above-mentioned configuration, the above-mentioned interference that may occur during handover is described. Fig. 15 is a schematic diagram to explain the time difference that may cause interference, in case of not providing diversity equalizing parts in the control station. In Fig. 15, for simplicity, it is assumed that the mobile station MS is under handover between the base station BS1 and the base station BS2. In case of mobile stations communicating via the base station BS1, that communication continues through the base station BS2 and the base station BS3 (hereinafter, referred to as a route r1) to arrive at the control station 201. In case of mobile stations communicating via the base station BS2, that communication continues through the base station BS3 (hereinafter, referred to as a route r2) to arrive at the control station 201.

[0128] The control station 201 receives signals passed through the route r1 and signals passed through the route r2 at the same time, and monitors and compares the quality of both connections in order to perform handover.

[0129] For simplifying here, in Fig. 15 a radio circuit part 301 comprehensively represents components necessary for transmitting and receiving signals, except the coupler 208 and the antenna 211 in the base stations BS1-BS3.

[0130] As described in Fig. 15, it is assumed here that t1 represents a time required for transferring signals from the mobile station MS to the base station BS1, t2 represents a time required for transferring signals from the mobile station MS to the base station BS2, t12 represents a time required for transferring signals from the base station BS1 to the base station BS2 via the route r1, and t represents a time required for transferring signals from the base station BS2 to the control station 201

via the routes r_1 and r_2 , whereby a total time required for transferring via the route r_1 equals to $t+t_1+t_{12}$, and a total time required for transferring via the route r_2 equals to $t+t_2$.

[0131] Therefore, even though transmitted from the same mobile station MS, a time lag $\Delta t = |(t_1+t_{12})-t_2|$ arises for arrival at the control station 201 between the signals via the route r_1 and the signals via the route r_2 .

[0132] The times required to transfer t_1 , t_2 , and t_{12} are values that always vary because of the position of the mobile station MS, the condition of installation of the base station BS, and any other factors of a communication environment. Therefore, it is difficult to accomplish the above time-adjustment.

[0133] As described above, since both signals routed in the route r_1 and the route r_2 have the same wavelength, those signals interfere with each other at the optical receiver in the control station as the result of the above-mentioned time lag. Therefore, even though soft handover is achieved by receiving the signal via the route r_1 and the signal via the route r_2 at the same time and monitoring the quality of connections, establishing and maintaining communication during performing a soft handover may be difficult.

[0134] The diversity equaling part 207 is provided to avoid such difficulties from arising. When optical signals having the same wavelength are received, after these signals are converted into electric signals by the optical receiving device 206, the diversity equaling part 207 equalizes the converted received signals. Since all signals including the delayed waves are equalized by this process, the above-mentioned interference is avoided, and the diversity effect is obtained, whereby the quality of connection increases.

[0135] The operation of the radio communication system shown in Fig. 14 will now be then described. It is assumed here that there are the mobile stations MS1 and MS2, and the wavelength λ_{MS1} is assigned to the mobile station MS1 as the wavelength specific for the MS1 and the wavelength λ_{MS2} is assigned to the mobile station MS2 as the wavelength specific for the MS2.

[0136] It is assumed now that the mobile station MS1 is located in a cell under control of the base station BS3. A signal transmitted for the mobile station MS1 via the backbone network is firstly received by the controller 202 in the control station 201, and is then fed to the MUX/DEMUX 203.

[0137] The transmission signal intended for the mobile station MS1 is then split off by the MUX/DEMUX 203, and is converted into the optical signal having the wavelength λ_{MS1} by the variable-wavelength optical source 204.

[0138] The transmission signal intended for the mobile station MS1 is then combined with signals having other wavelengths by the WDM coupler 205, and is transmitted by the control station 201.

[0139] The transmission signals for the mobile station MS1 that are passed thus through the network of radio

base stations are split off and taken into the WDM coupler 208 in the base station BS3.

[0140] Then, the transmission signals intended for the mobile station MS1 are converted into electrical signals by the optical receiver 209, are modulated by the access MODEM 213 in the access radio transceiver 210, and are then transmitted to the mobile station MS1 via the antenna 211 by the radio transceiver 212.

[0141] On the other hand, a signal transmitted from the mobile station MS1 is firstly received by the radio transceiver 212 in the access radio transceiver 210 via the antenna 211 in the base station BS3, is demodulated by the access MODEM 213, and is then transmitted to the variable-wavelength optical source 214.

[0142] Then, the transmission signal sent from the mobile station MS1 is converted into an optical signal having the wavelength λ_{MS1} by the variable-wavelength optical source 214, is combined by the WDM coupler 208, and is then transmitted to the control station 201 using the wavelength multiplexing transmission method.

[0143] Then, the transmission signal sent from the mobile station MS1 is split off and taken into the WDM coupler 205 in the control station 201.

[0144] Then, the transmission signal sent from the mobile station MS1 is converted into an electric signal, and is then transferred to the diversity equalizer 207 by the optical receiver for MS1 in the optical receiving device 206 that is the optical receiver specific for the wavelength λ_{MS1} .

[0145] Then, the transmission signal sent from the mobile station MS1 is equalized when there are some components arriving with time differences in the same-wavelength signal, and is then transferred to the MUX/DEMUX 203.

[0146] Then, the transmission signal from the mobile station MS1 is multiplexed, and is transferred to the backbone network via the controller 202.

[0147] It is here regarded that the mobile station MS1 moves from a cell under control of the base station BS3 to another cell under control of the base station BS4. As described above, during handover, each of the base station BS3 and the base station BS4 converts the signal received from the mobile station MS1 into the optical signal having the wavelength λ_{MS1} , and transfers the optical signal to the control station 201.

[0148] The control station 201 near-simultaneously receives signals routed via the base station BS3 and signals routed via the base station BS4, and monitors the quality of both connections.

[0149] The optical signal having the wavelength λ_{MS1} transmitted from the base station BS3 and the optical signal having the wavelength λ_{MS1} transmitted from the base station BS4 arrive at the control station 201 with the time difference that always varies, as described above.

[0150] All received signals having the wavelength λ_{MS1} are converted into electric signals by the same op-

tical receiver, irrespective of which base station transmits each of those signals.

[0151] The converted electric signals received from the mobile station MS1 under handover including the delayed waves are equalized by the diversity equalizer 207, as described above.

[0152] Since the signals transmitted from the mobile station MS1 under handover are thus equalized irrespective of through which base station those signals pass, the interference due to the time difference of arrival at the control station can be eliminated, and the effect of diversity can be obtained.

[0153] Therefore, during handover of the mobile station, the control station near-simultaneously receives signals transmitted from the mobile stations in order to monitor the condition of connections to perform handover, while signals transmitted from all possible destination base stations of the handover are equalized rather than only a single signal from either of the possible destination base stations being handled as the received signal. Consequently the quality of telephone speech can be retained during the handover, irrespective of the position and the movement of the mobile station and other factors of the communication environment.

[0154] Although it is described that the diversity equalizer 207 equalizes all signals transmitted from the mobile station under handover in this context, the diversity equalizer 207 may equalize only chosen signals with the known aspect and method in order to further increase the quality of communication.

[0155] Fig.16 is a diagram partially showing a schematic of a radio communication system according to the ninth embodiment of the present invention. This embodiment has a configuration similar to the one of the configurations according to the eighth embodiment, however this embodiment uses a sub-carrier optical transmission method instead of wavelength multiplexing transmission method as the transmission method in the communication network including the plurality of base stations under control of the control station.

[0156] In Fig.16, a variable-wavelength entrance MOD 401 modulates a signal split off by the MUX/DEMUX 203 into an entrance radio signal. In frequencies of the entrance radio signals, a different frequency is assigned to each mobile station. It is here assumed that there are N mobile stations and they respectively employ one of the frequencies f_{MS1} - f_{MSN} .

[0157] A selective-frequency coupler 402 frequency-multiplexes the entrance radio signals that are converted such that each converted signal has a different frequency for each destination mobile station, and splits off the signals having the wavelength specific for each base station among the multiplexed signal received and taken into.

[0158] An E/O 403 puts the frequency-multiplexed signal onto an optical sub-carrier, and transmits the optical sub-carrier to the communication network using the sub-carrier optical transmission method.

[0159] An O/E 404 converts the received optical signal into a frequency-multiplexed radio signal. A variable-wavelength entrance DEM 405 demodulates the entrance radio signal.

[0160] The entrance MODEM 406 demodulates the entrance radio signal taken into, and modulates the signal received from the mobile station into the entrance radio signal.

[0161] Even though the transmission method is thus switched to the sub-carrier optical transmission method, the process during the handover is not changed, so that by equalizing the received signals with the diversity equalizer 207 after wave-splitting, whereby the effect similar with one of the eighth embodiment is obtained.

[0162] Also, the ninth embodiment can be employed with a configuration of the control station and each base station depending with the optical receivers and the variable-wavelength optical sources so as to obtain a reduction of configuration and/or processing steps.

[0163] Fig.17 is a diagram partially showing a schematic of the radio communication system according to the tenth embodiment of the present invention. This embodiment has a configuration similar to the configuration of the ninth embodiment, however the tenth embodiment uses the access radio signals instead of the entrance radio signals.

[0164] In Fig.17, a variable-frequency MOD 501 modulates the signal split by the MUX/DEMUX 203 into the access radio signal. In frequencies of the access radio signals, a different frequency is assigned to each mobile station. It is here assumed that there are N mobile stations and they respectively employ one of the frequencies f_{MS1} - f_{MSN} . A variable-frequency access DEM 502 demodulates the access radio signal.

[0165] In the sub-carrier optical transmission method, the access radio signal used in the radio communication between each base stations and the mobile station is thus utilized for the radio signal at a stage before being carried on the sub-carrier so that it becomes possible for each base station to dispense with the modulator/demodulator for the access radio signal, and further reduction of configuration and/or processing steps in the base station can be obtained than in the eleventh embodiment. It is also clear that an effect similar to the one of the eighth embodiment can be obtained as well.

[0166] Although the case is described to frequency-multiplex the signals to be carried on the optical sub-carrier (that is FDMA) in the contexts of the ninth and tenth embodiments, other methods, for example, time-division multiplexing (TDMA), code division multiplexing (CDMA), can be used. In those cases, the splitting part in the control station and each base station would be a corresponding one for the method used.

[0167] Also, although the case is mainly described that the plurality of base stations are connected in the loop structure in the communication network under control of the control station in the context of the above-mentioned embodiments, the base station network ac-

according to the present invention can be organized into a mesh structure as shown in Fig.18 and into a cluster structure as shown in Fig.19, as well as the examples shown in the seventh embodiment.

[0168] In the case of Fig.18, the base station BS5 become a control station 601, while, in the case of Fig.19, there is a cluster control stations 701 respectively controlling each cluster and a control station 702 controlling the plurality of cluster control stations 701. Each control station corresponds to the control station described in the eighth to tenth embodiments.

[0169] Further, although, in the context of all the above-mentioned embodiments, performing handover is limited to the example of a radio communication terminal that is a mobile station, other communication terminals communicating with the network of radio base stations directly or via the external communication network connected with the radio base station network through the control station are not limited to the mobile radio terminals and may be stationary wired terminals such as personal computers, mobile wired terminals such as PDAs, and stationary wireless terminals such as wireless LANs.

[0170] Furthermore, although in the contexts of all the above-mentioned embodiments, the WDM coupler is described as an example of the device for splitting and combining the optical signals, these embodiments are not limited to the WDM coupler, and the present invention can employ any other devices that can split and combine the optical signals by wavelength and can have an arbitrary configuration and form. The present invention can employ for example a device comprising a variable-wavelength filter such as OADM (Optical Add-Drop Multiplexer), or AOTF (Acoustic Optical Tunable Filter).

[0171] As described above, according to the base station network of the present invention, the wavelength of the optical signal transmitted from the base station through the optical fiber cable to the control station is specific for each mobile station, so that, although the mobile station is under handover, the control station can receive all that mobile station's transmissions with the single optical receiver. Therefore, by having a configuration dispensing with the selective switch compared to the prior art, it becomes possible to reduce configuration and processing steps.

[0172] Also, in the control station, the equalizing part is provided at the subsequent stage of the optical receiver, so that, when the control station receives the optical signals having the same wavelength from the different base stations, it becomes possible to avoid those signals interfering with each other, to obtain the effect of diversity, and to increase the quality of communication during the soft handover of the mobile station.

Claims

1. A network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers using a wavelength multiplexing transmission method, wherein:

the base station comprises a variable-wavelength transmitter for transmitting an optical signal having a predetermined wavelength, and an optical coupler for combining optical signals from the variable-wavelength transmitter in order to transmit the optical signals using the wavelength multiplexing transmission method; the control station comprises a plurality of optical receivers for receiving wavelengths of the optical signals transmitted using the wavelength multiplexing transmission method, and an optical coupler for splitting the wavelength-multiplexed optical signals transmitted from the base stations to the optical receivers by wavelength; and

when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal controls the wavelength of the variable-wavelength transmitter, and then transmits the optical signals to the control station with the same wavelength as one used for transmitting by a previous base station which communicates with the radio communication terminal before the movement.

2. The network system of radio base stations as claimed in claim 1, characterized in that:

the optical coupler provided in the base station splits off only a particular wavelength from the optical signals with a plurality of wavelengths to be transmitted using the wavelength multiplexing transmission method, and the base station further comprises an optical receiver for receiving optical signals split off by the optical coupler;

the control station further comprises a plurality of variable-wavelength optical transmitters for transmitting the optical signals used in the wavelength multiplexing transmission method, and the optical coupler provided in the control station combines the optical signals from the variable-wavelength optical transmitter in order to transmit the optical signals with the wavelength multiplexing transmission method; and

when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, the control station controls the wavelength of the variable-wavelength transmitter, and then transmits the optical signals to the new base station with a wavelength intended for use by the new base station.

3. The network system of radio base stations as claimed in claim 1, **characterized in that:**

the optical coupler provided in the base station is a variable optical coupler and varies a wavelength to be split off from the optical signals having a plurality of wavelengths transmitted using the wavelength multiplexing transmission method, and the base station comprises an optical receiver for receiving the optical signals split off by the variable optical coupler; and when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, the control station does not change the wavelength of the optical signals to be transmitted to the base station even when the radio communication terminal changes the base station to be communicate with, and the new base station splits off and receives the optical signals of the same wavelength from the control station with the variable optical coupler.

4. The network system of radio base stations as claimed in each of claims 1-3, **characterized in that:**

the base station further comprises a radio signal demodulator for mobile communication for demodulating radio signals received from the radio communication terminal and for converting the demodulated signals into digital signals, an optical transmitter for converting the digital signals intended for the control station converted by the radio signal demodulator for mobile communication into optical signals to be transmitted using the wavelength multiplexing transmission method, an optical receiver for receiving optical signals transmitted by wavelength-multiplexing from the control station, and a radio signal modulator for mobile communication for converting the digital signals converted by the optical receiver into radio frequency signals for mobile communication; and the control station further comprises an optical receiver for converting the optical signals received from the base station and transmitted using the wavelength multiplexing transmission method into digital signals, and an optical trans-

mitter for converting digital signals intended for the base station into wavelength-multiplexed optical signals.

5. The network system of radio base stations as claimed in each of claims 1-3, **characterized in that:**

the base station further comprises a radio signal demodulator for mobile communication for demodulating radio signals for mobile communication received from the radio communication terminal and for converting the demodulated signals into digital signals, an entrance radio signal modulator for converting the digital signals converted by the radio signal demodulator for mobile communication into entrance radio signals, an optical transmitter for converting the entrance radio signals converted by the entrance radio signal modulator into optical signals in order to transmit the optical signals using the sub-carrier optical transmission method, an optical receiver for converting the entrance radio signals transmitted using the sub-carrier optical transmission method into electrical signals, an entrance radio signal demodulator for converting the converted electrical entrance radio signals into digital signals, a radio signal modulator for mobile communication for converting the digital signals converted by the entrance radio signal demodulator into radio frequency signals for mobile communication; and

the control station further comprises an optical receiver for converting optical signals transmitted with the entrance radio signals sent from the base station using the sub-carrier optical transmission method into electrical signals, an entrance radio signal demodulator for converting the converted electrical entrance radio signals into digital signals, an entrance radio signal modulator for converting the digital signals intended for base stations into the entrance radio signals, and an optical transmitter for converting the entrance radio signals converted by the entrance radio signal modulator into optical signals in order to transmit the optical signals using the sub-carrier optical transmission method.

6. The network system of radio base stations as claimed in each of claims 1-3, **characterized in that:**

the base station further comprises an optical transmitter for converting radio signals received from the radio communication terminal into optical signals in order to transmit the op-

tical signals using the sub-carrier optical transmission method, and an optical receiver for converting optical signals transmitted with radio signals received from the control station using the sub-carrier optical transmission method into electrical signals; and

the control station further comprises an optical receiver for converting optical signals transmitted with radio frequency signals for mobile communication using the sub-carrier optical transmission method into electrical signals, a radio signal demodulator for mobile communication for converting the converted electrical radio frequency signals for mobile communication into digital signals, a radio signal demodulator for mobile communication for converting the digital signals intended for the base stations into radio frequency signals for mobile communication, and an optical transmitter for converting the radio frequency signals for mobile communication converted by the radio signal demodulator for mobile communication into optical signals to be transmitted using the sub-carrier optical transmission method.

7. A network system of radio base stations comprises base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers with a sub-carrier optical transmission, wherein:

the base station comprises a radio signal demodulator for mobile communication for demodulating radio signals for mobile communication received from the radio communication terminal and for converting the demodulated signals into digital signals, a variable-frequency entrance radio signal modulator for converting the signals converted by the radio signal demodulator for mobile communication into entrance radio signals, an optical receiver for converting radio signals transmitted from the control station or other base stations using the sub-carrier optical transmission method into electrical signals, and a coupler for combining an output of the optical receiver and an output of the variable-frequency entrance radio signals modulator;

the control station comprises: an optical receiver for converting optical signals transmitted with the entrance radio signals using the sub-carrier optical transmission method into electrical signals, a selective-frequency coupler for splitting off the outputs from the optical receiver by frequency, and an entrance radio signal demodulator for converting each entrance radio signal split off by the selective-frequency cou-

pler into digital signals; and

when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal controls a carrier frequency of the variable-frequency entrance radio signals modulator, and transmits the entrance radio signals to the control station on the same frequency as one used for transmitting by a previous base station which communicates with the radio communication terminal before the movement.

8. The network system of radio base stations as claimed in claim 7, **characterized in that:**

the base station comprises an optical receiver for converting the entrance radio signals transmitted using the sub-carrier optical transmission method into electrical signals, a selective-frequency coupler for splitting off a predetermined frequency signal from the outputs of the optical receiver, an entrance radio signal demodulator for converting the entrance radio signals split off by the selective-frequency coupler into digital signals, and a radio signal modulator for mobile communication for converting the digital signals converted by the entrance radio signal demodulator into radio frequency signals for mobile communication;

the control station comprises a variable-frequency entrance radio signal modulator for converting digital signals intended for base stations into the entrance radio signals, a coupler for combining the output of the variable-frequency entrance radio signal modulator, and an optical transmitter for converting the entrance radio signals converted by the entrance radio signal modulator into optical signals in order to transmit the optical signals using the sub-carrier optical transmission method; and when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, the control station controls and converts the carrier frequency of the variable-frequency entrance radio signal modulator that converts the digital signals intended for base stations into the entrance radio signals, into the entrance radio frequency intended for use by the new base station.

9. The network system of radio base stations as claimed in claim 7, **characterized in that:**

the base station further comprises an optical re-

ceiver for converting radio signals having a plurality of frequencies and transmitted using the sub-carrier optical transmission method into electrical signals, a variable selective-frequency coupler for splitting off only predetermined frequencies, and a radio signal modulator for mobile communication for converting the electrical signals split off by the variable selective-frequency coupler into radio frequency signals for mobile communication;

the control station further comprises a plurality of entrance radio signal modulators for converting the digital signals intended for the base stations into entrance radio signals, a coupler for multiplexing the electrical signals from the entrance radio signal modulators, and an optical transmitter for converting outputs of the coupler into optical signals in order to transmit the optical signals using the sub-carrier optical transmission method; and

when the radio communication terminal communicating with the base station moves and changes the base station to communicate with, the control station does not change the carrier frequency of the variable-frequency entrance radio signal modulator even when the radio communication terminal changes the base station to be communicated with and the new base station changes the frequency for splitting in the variable selective-frequency coupler into a frequency of the entrance radio signal intended for use of the previous base station.

10. The network system of radio base stations as claimed in each of claims 1-9, **characterized in that:**

the network system of radio base stations is organized in a loop structure, wherein the network system comprises the base stations provided in the plurality of cells and the control station controlling the base stations, in which the base stations and the control station are connected by the optical fibers.

11. The network system of radio base stations as claimed in each of claims 1-9, **characterized in that:**

the network system of radio base stations is organized in a mesh structure, wherein the network system comprises the base stations provided in the plurality of cells and the control station controlling the base stations, in which the base stations and the control station are connected by the optical fibers.

12. The network system of radio base stations as

claimed in each of claims 1-9, **characterized in that:**

the network system of radio base stations is organized in a cluster structure, wherein the network system comprises the base stations provided in the plurality of cells and the control station controlling the base stations, in which the base stations and the control station are connected by the optical fibers.

13. The network system of radio base stations as claimed in claim 12, **characterized in that:**

the network system of radio base stations further comprises an upper-level control station for controlling cluster control stations; and when the radio communication terminal communicating with the base station moves and changes the cluster to communicate with, a cluster control station used by the radio communication terminal before the movement transmits signals sent from the radio communication terminal to a new cluster control station which communicates with the radio communication terminal after the movement via the upper-level control station with the same wavelength as one used for transmitting optical signals by the previous base station, and the new cluster control station transmits signals sent from the radio communication terminal to the new cluster control station with the same wavelength as one used for transmitting optical signals by the previous base station.

14. The network system of radio base stations as claimed in claim 12, **characterized in that:**

the network system of radio base stations further comprises an upper-level control station for controlling cluster control stations; when the radio communication terminal communicating with the base station moves and changes the cluster to communicate with, a previous cluster control station which communicates with the radio communication terminal before the movement transmits signals intended for the radio communication terminal via the upper-level control station and a new cluster control station on the same wavelength as one used for transmitting optical signals to the previous base station, and the new cluster control station transmits signals intended for the radio communication terminal to the new cluster control station with the same wavelength as one used for transmitting optical signals to the previous base station.

15. The network system of radio base stations as claimed in one of claim 13 or 14, **characterized in that:**

the upper-level control station comprises an optical wavelength converting part; and when a wavelength of the optical signals used for transmission to the previous base station is used in the new cluster, the upper-level control station converts the wavelength into one that is not being used in the new cluster by the wavelength converting part, and transmits the optical signals to the cluster control station in the new cluster.

16. A network system of radio base stations comprising a plurality of base stations communicating with radio communication terminals, a control station comprehensively controlling the base stations and communicating with an external communication network, and optical fiber lines connecting the base stations and the control station, in which each of the base stations receives signals transmitted by the radio communication terminal, converts the received signals into optical signals, and then transmits the converted optical signals to the control station via the optical fiber lines; wherein:

each of the base stations comprises a signal converting part for converting signals transmitted from the radio communication terminal into optical signals having different wavelengths assigned particularly to each of the sending radio communication terminals; and the control station comprises an optical signal receiving part for receiving via the optical fiber lines near-simultaneously optical signals having an identical wavelength that are converted respectively by the signal converting part from signals transmitted from the same radio communication terminal and received by at least two base stations, and for converting the received signals into electrical signals to be output, and an equalizing part for equalizing the output signals.

17. The network system of radio base stations as claimed in claim 16, **characterized in that:**

each of the base stations and the control station are connected in a loop structure.

18. The network system of radio base stations as claimed in claim 16, **characterized in that:**

each of the base stations and the control station are connected in a mesh structure.

19. The network system of radio base stations as claimed in claim 16, **characterized in that:**

each of the base stations and the control station are connected in a cluster structure.

20. The network system of radio base stations as claimed in each of claims 16-19, **characterized in that:**

a wavelength multiplexing transmission method is applied to the communication between each of the base stations and the control station.

21. The network system of radio base stations as claimed in each of claims 16-19, **characterized in that:**

a sub-carrier optical transmission method is applied to the communication between each of the base stations and the control station, each of which sub-carrier optical signals carries signals frequency-multiplexed from the entrance radio signals.

22. The network system of radio base stations as claimed in each of claims 16-19, **characterized in that:**

a sub-carrier optical transmission method is applied to the communication between each of the base stations and the control station, each of which sub-carrier optical signals carries signals frequency-multiplexed from access radio signals,

wherein the access radio signal is used for radio communication between each base station and the radio communication terminals.

23. A control station which controls a network system of radio base stations comprising a plurality of base stations communicating with radio communication terminals, and optical fiber lines, further comprising:

an optical signal receiving part for receiving via the optical fiber lines near-simultaneously optical signals having a different wavelength assigned particularly to each sending radio communication terminal that are converted respectively by the signal converting part from signals transmitted from an identical radio communication terminal and received by at least two base stations, and for converting the received signals into electric signals to be output; and an equalizing part for equalizing the output signals.

24. A method for switching of base stations in a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers, wherein:

a wavelength for transmission from the base station to the control station is set at the beginning of a communication between the base station and the radio communication terminal, and this wavelength for transmission is fixed while the radio communication terminal is communicating; and

even when the radio communication terminal moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal transmits information from the radio communication terminal to the control station on the wavelength for transmission set for the radio communication terminal.

25. A method for switching of base stations in a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers, wherein:

the control station comprises a variable-wavelength transmitter; and

a different wavelength for transmission from the control station to the base station is set for each base station, and when the radio communication terminal moves and changes the base station to communicate with, the control station controls a wavelength of the variable-wavelength transmitter and transmits information intended for the radio communication terminal to a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal, on the wavelength for transmission set for a new base station which communicates with the radio communication terminal after the movement.

26. A method for switching of base stations in a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers, wherein:

a different wavelength for transmission from the control station to the base station is set for each

base station, and when the radio communication terminal moves and changes the base station to communicate with, the control station transmits information of the radio communication terminal to a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal on the wavelength for transmission set for a previous base station which communicates with the radio communication terminal before the movement.

27. A method for switching of base stations in a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers with a sub-carrier optical transmission, wherein:

an entrance radio signal for a sub-carrier optical transmission from the base station to the control station is set at the beginning of a communication between the base station and a radio communication terminal, and the entrance radio signal is fixed while the radio communication terminal is communicating; and even when the radio communication terminal moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal transmits information of the radio communication terminal to the control station with the entrance frequency signal set for the radio communication terminal using the sub-carrier optical transmission method.

28. A method for switching of base stations in a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers with the sub-carrier optical transmission, wherein:

a different entrance radio signal sent from the control station to the base station is set for each base station; and

when the radio communication terminal moves and changes the base station to communicate with, the control station transmits information intended for the radio communication terminal to a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal with the entrance radio signal set for the new base station using the sub-carrier optical transmission.

sion method.

29. A method for switching of base stations in a network system of radio base stations comprising base stations provided in a plurality of cells and a control station controlling the base stations, in which the base stations and the control station are connected by optical fibers with a sub-carrier optical transmission, wherein:

a different entrance radio signal sent from the control station to the base station is set for each base station; and

when the radio communication terminal moves and changes the base station to communicate with, a new base station which communicates with the radio communication terminal after a movement of the radio communication terminal transmits information of the radio communication terminal to the control station using the sub-carrier optical transmission method with an entrance frequency signal set for a previous base station which communicates with the radio communication terminal before the movement.

30. A method for signal processing in a network system of radio base stations comprising a plurality of base stations communicating with radio communication terminals, a control station comprehensively controlling the base stations and communicating with an external communication network, and optical fiber lines connecting the base stations and the control station, comprising the steps of:

in each of the base stations, receiving signals transmitted from the radio communication terminal, converting the received signals into optical signals having different wavelengths assigned particularly to each of the sending radio communication terminals, and transmitting the converted signals to the control station via the optical fiber lines; and

in the control station, receiving via the optical fiber lines near-simultaneously optical signals having an identical wavelength that are converted from signals transmitted from the same radio communication terminal and received by at least two base stations, converting the received signals into electric signals, and equalizing the electric signals.

31. A method for handover control when signals are processed according to the signal processing method as claimed in claim 30, further comprising the steps of:

monitoring the condition of connection shown

by the received optical signals that have an identical wavelength and are received near-simultaneously by the control station, and determining whether the control station can terminate the handover process based on results of the monitoring; and establishing or sustaining a communication between the control station and the radio communication terminal under handover based on the equalized signals.

FIG.1

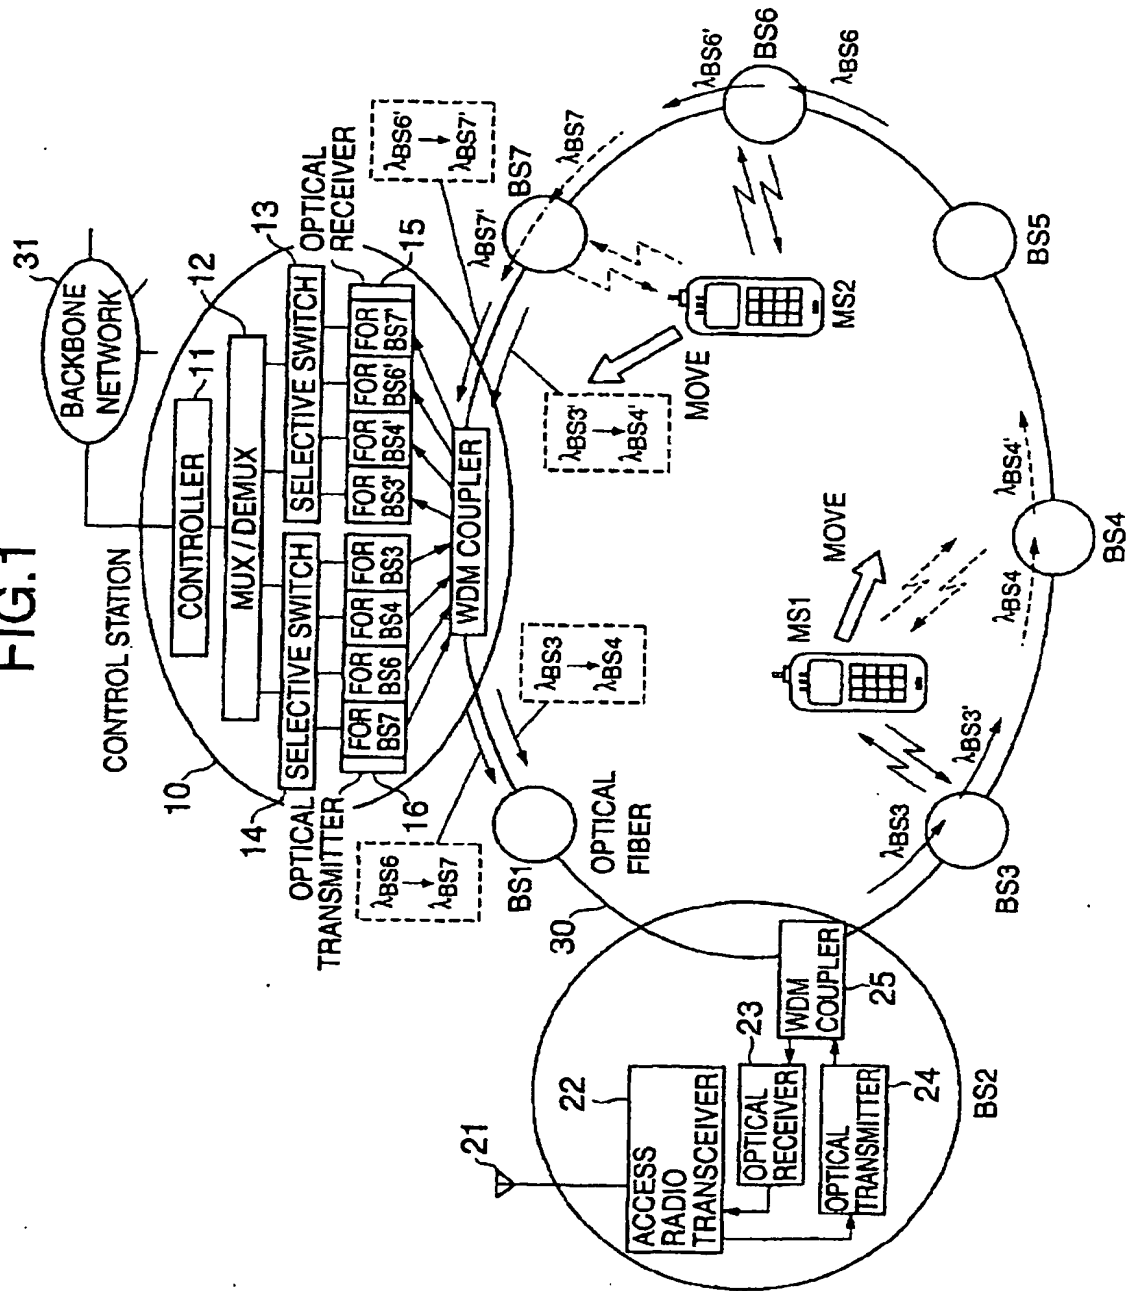


FIG.2

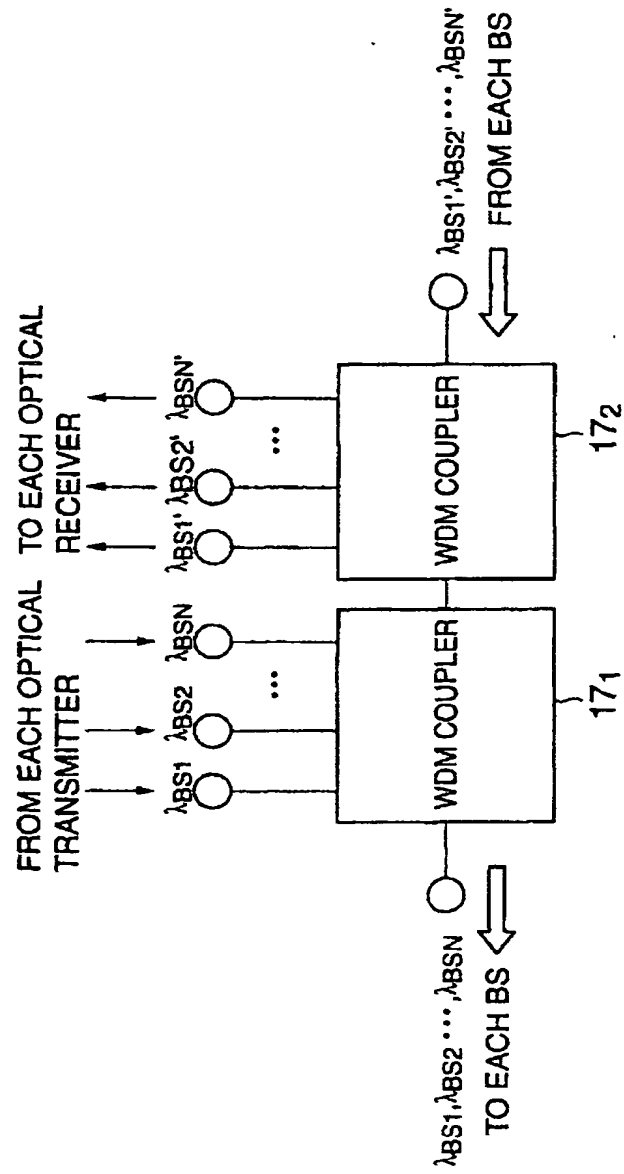


FIG. 3

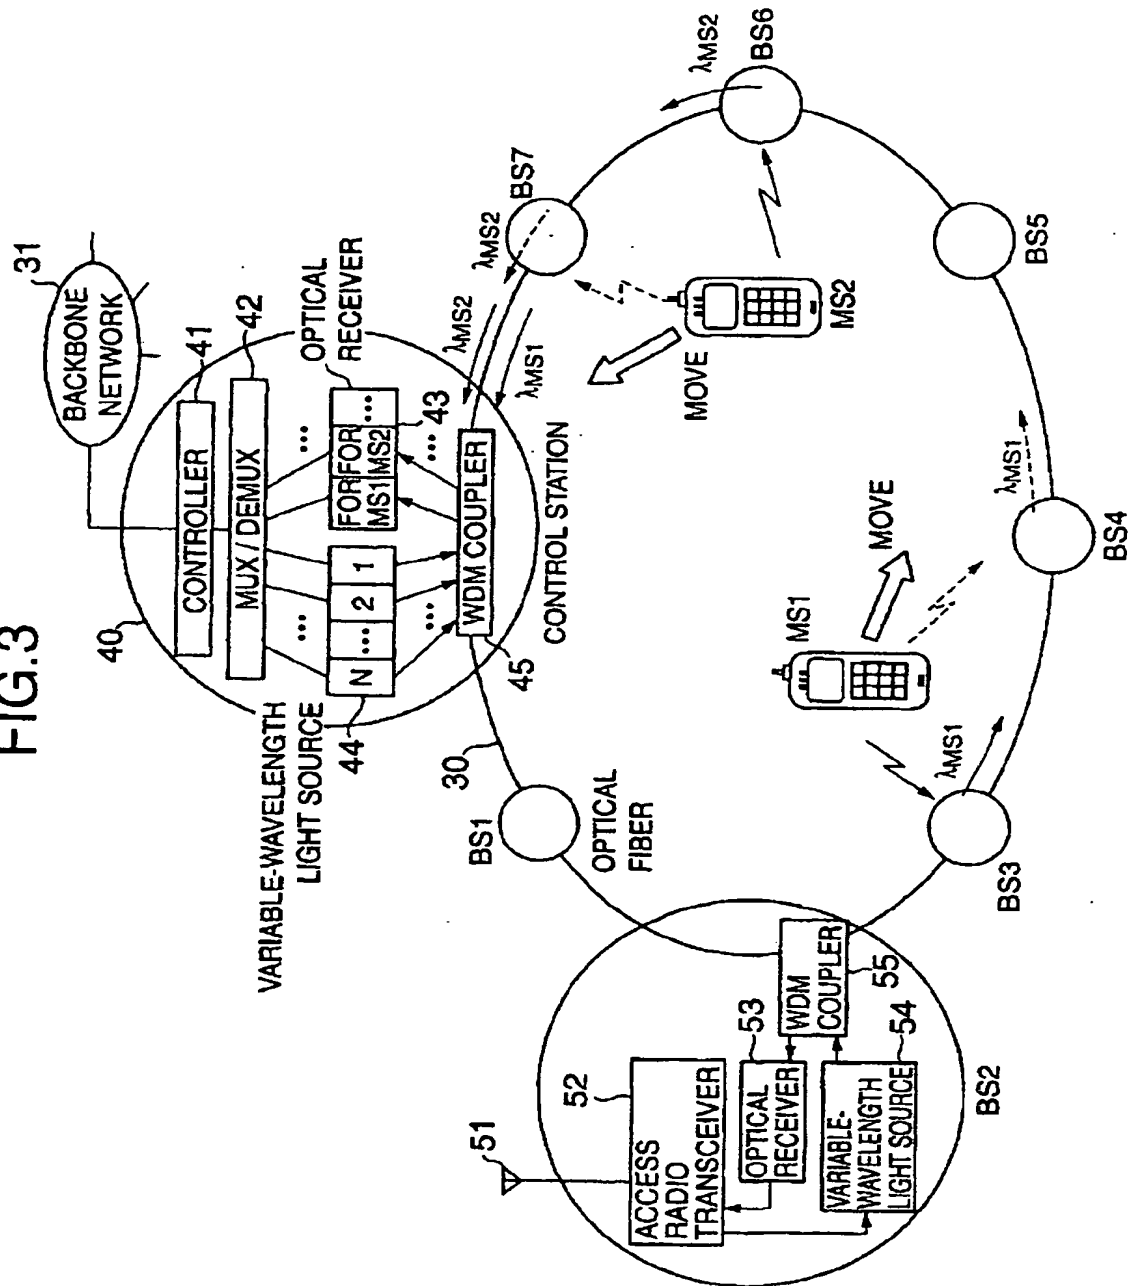


FIG.4

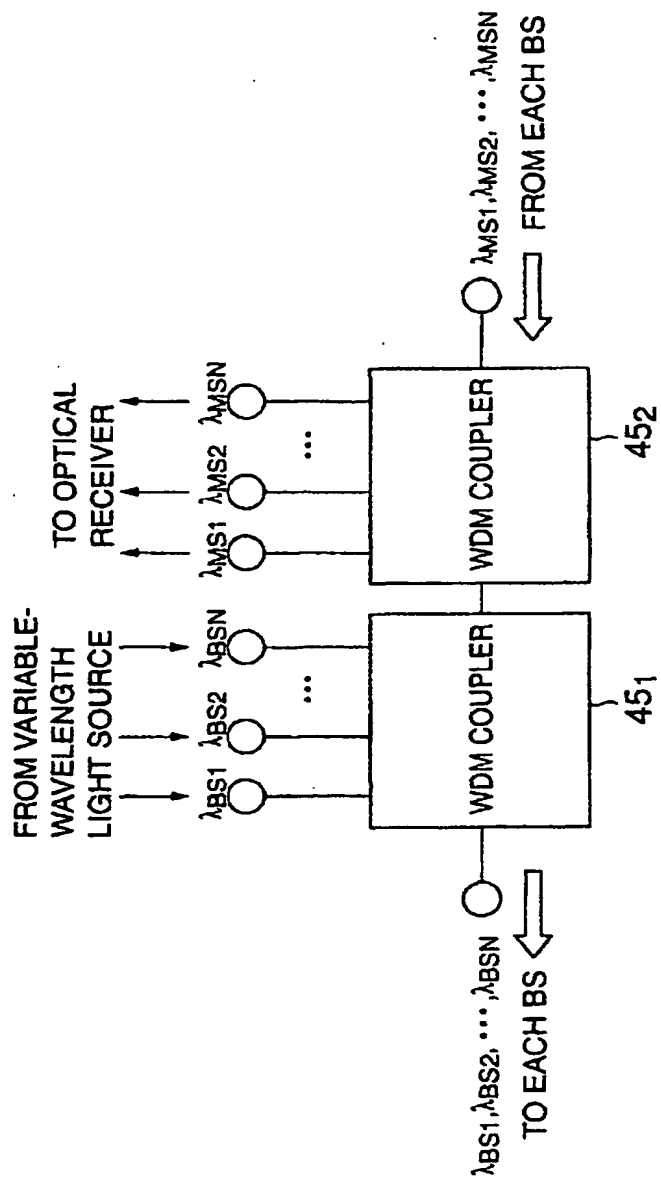


FIG. 5

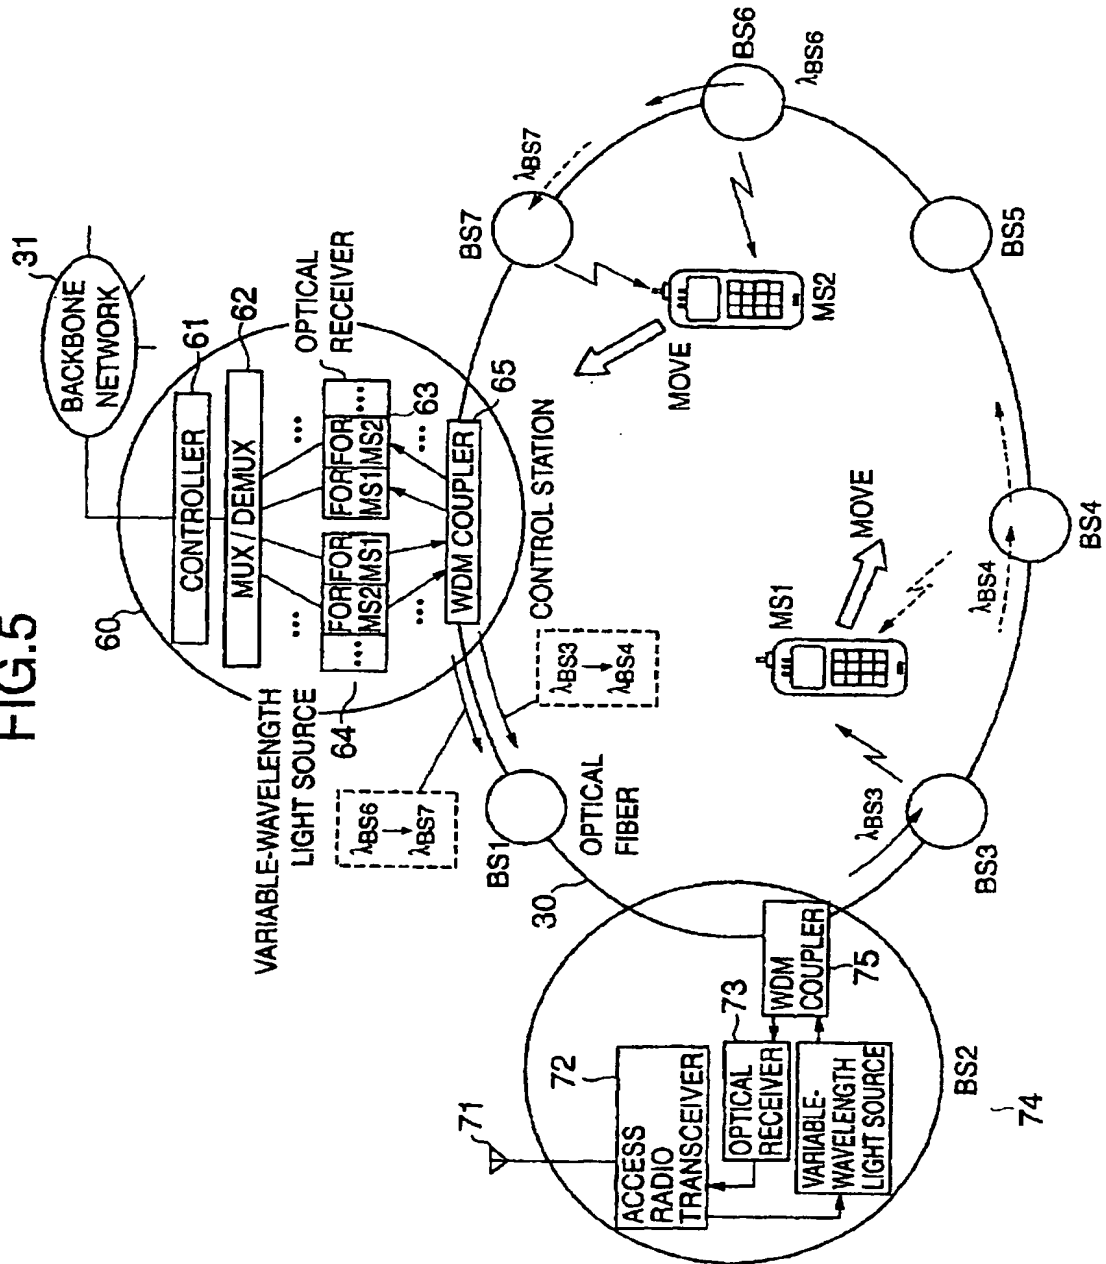


FIG.6

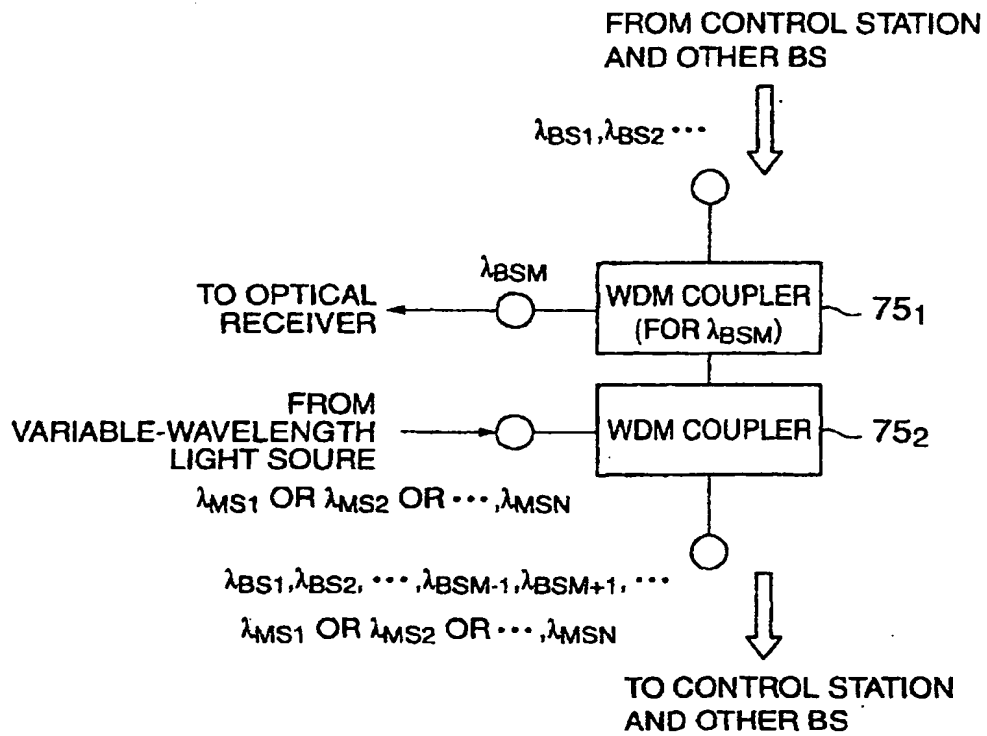


FIG. 7

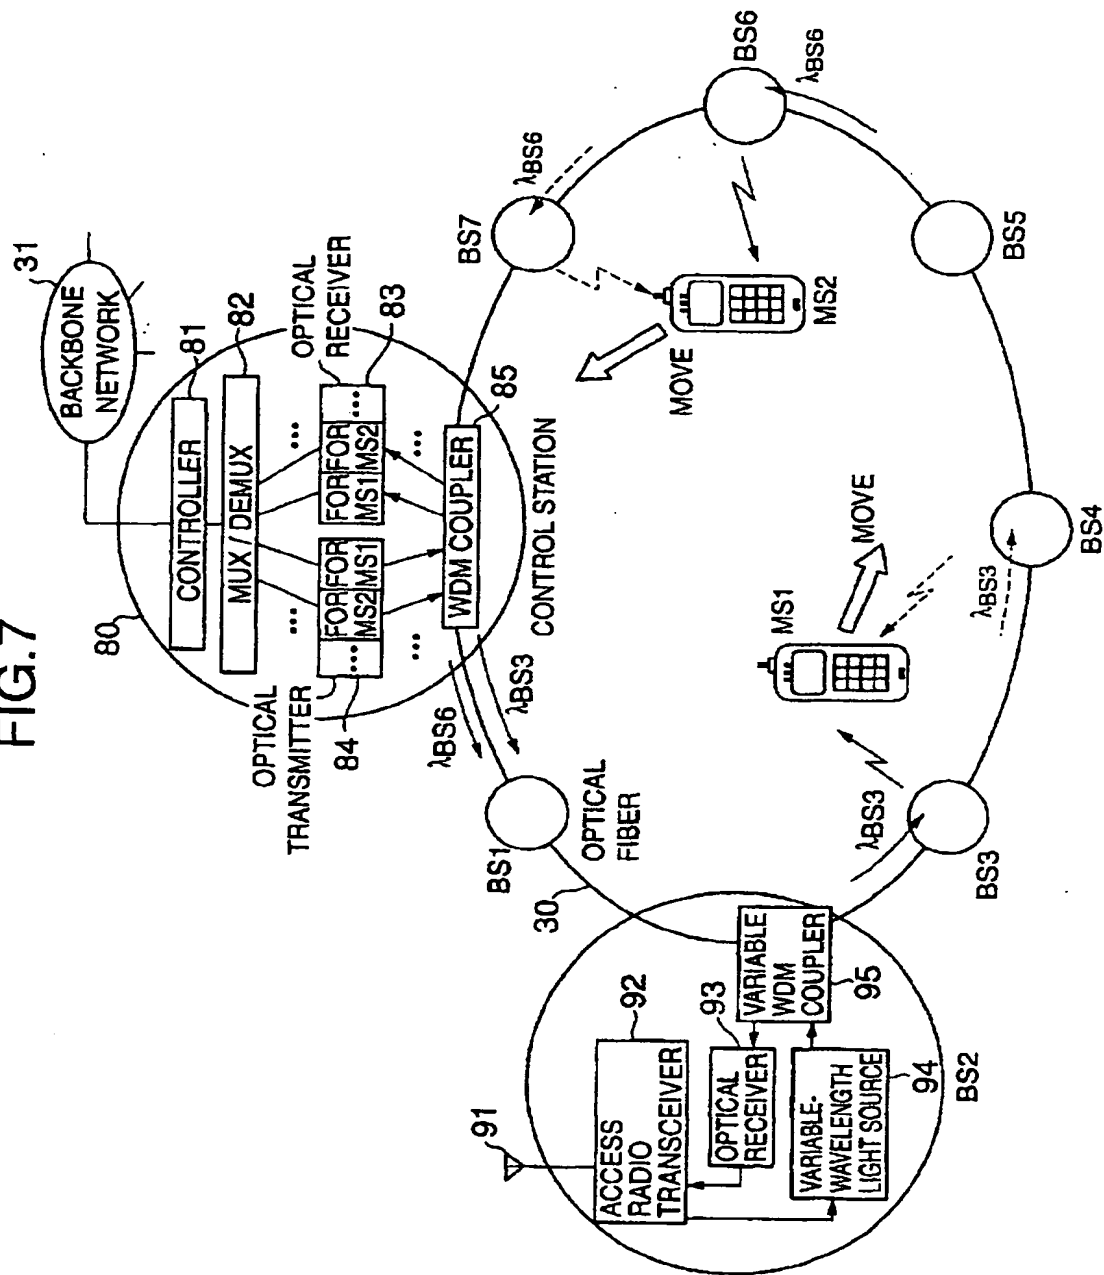


FIG.8

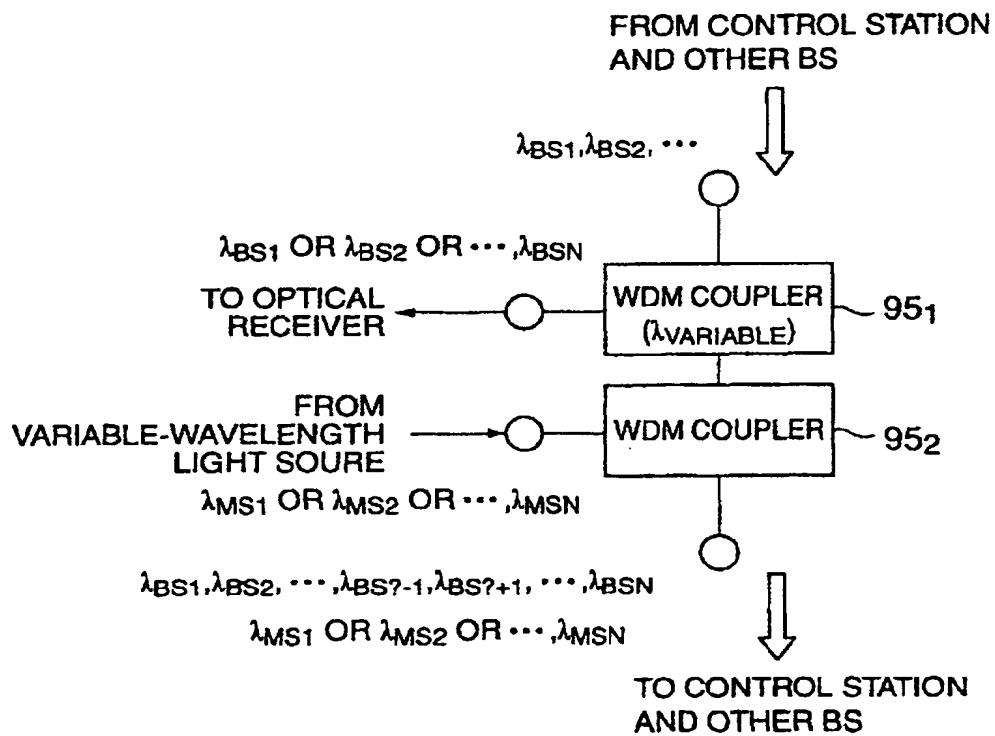


FIG.9

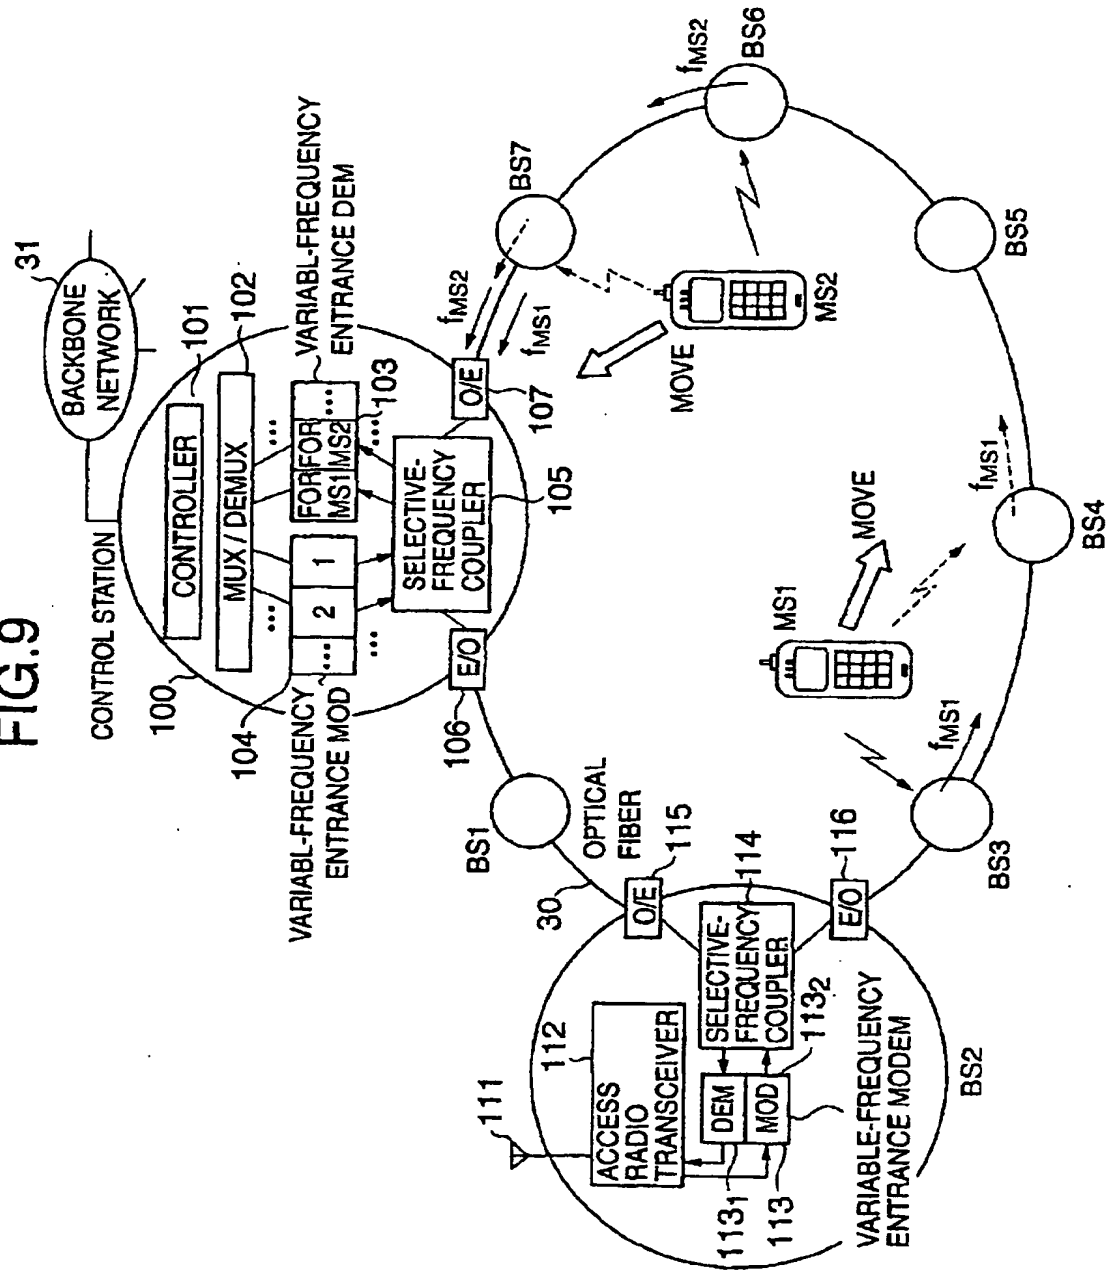


FIG. 10

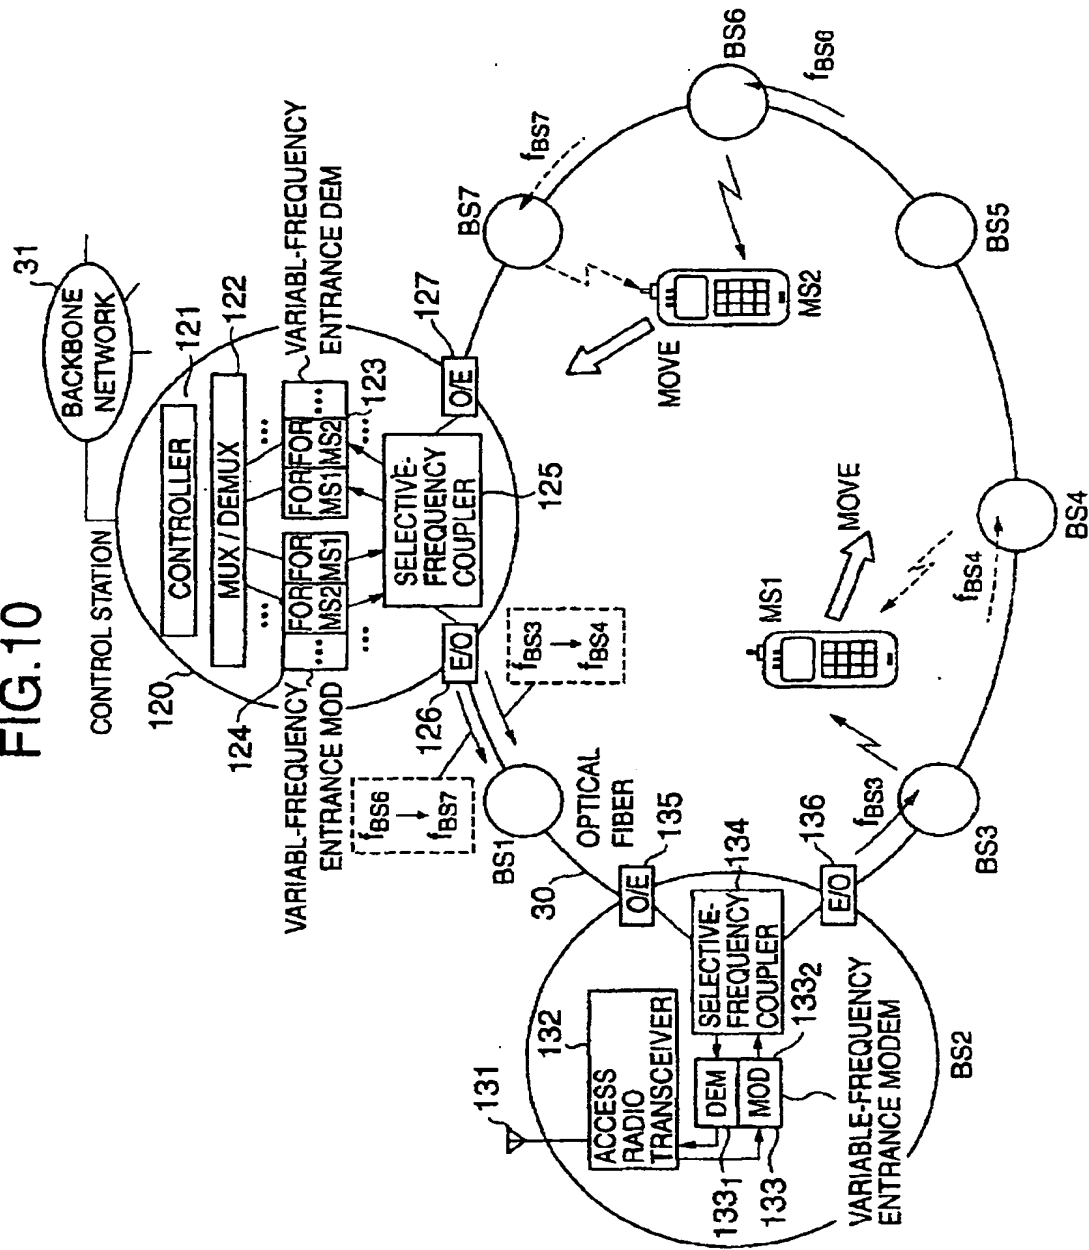


FIG. 11

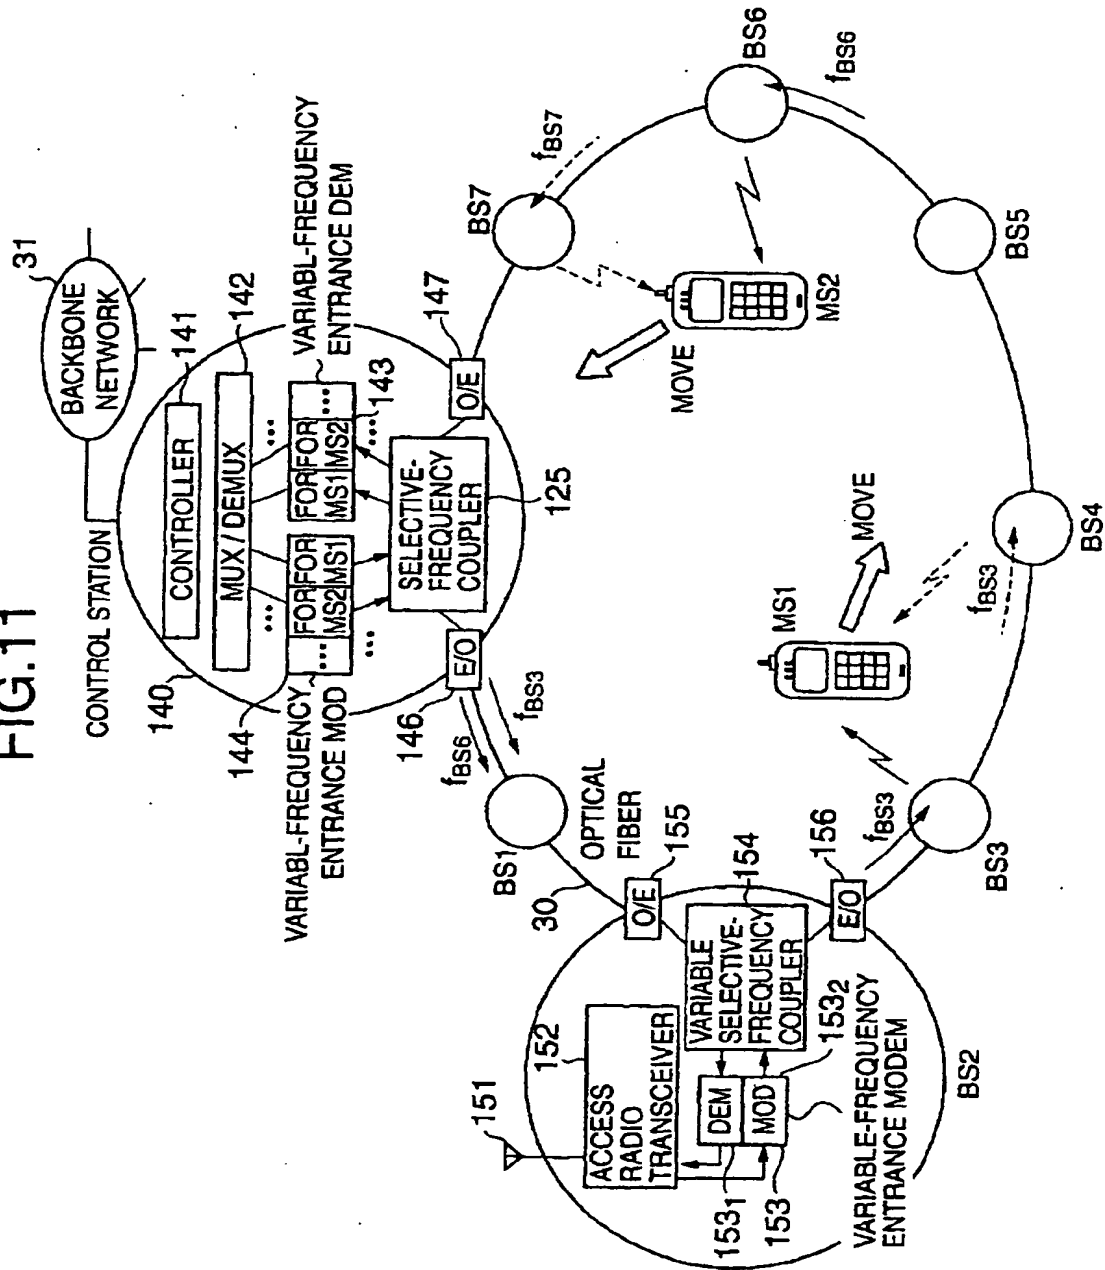


FIG.12

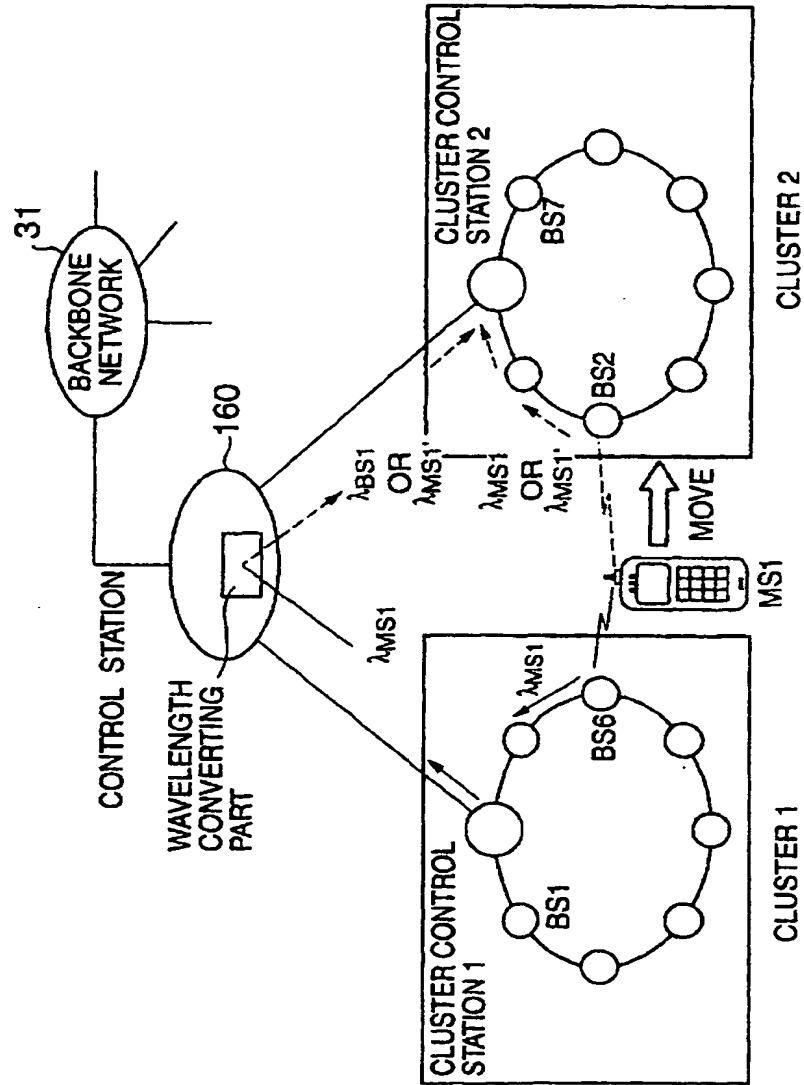


FIG.13

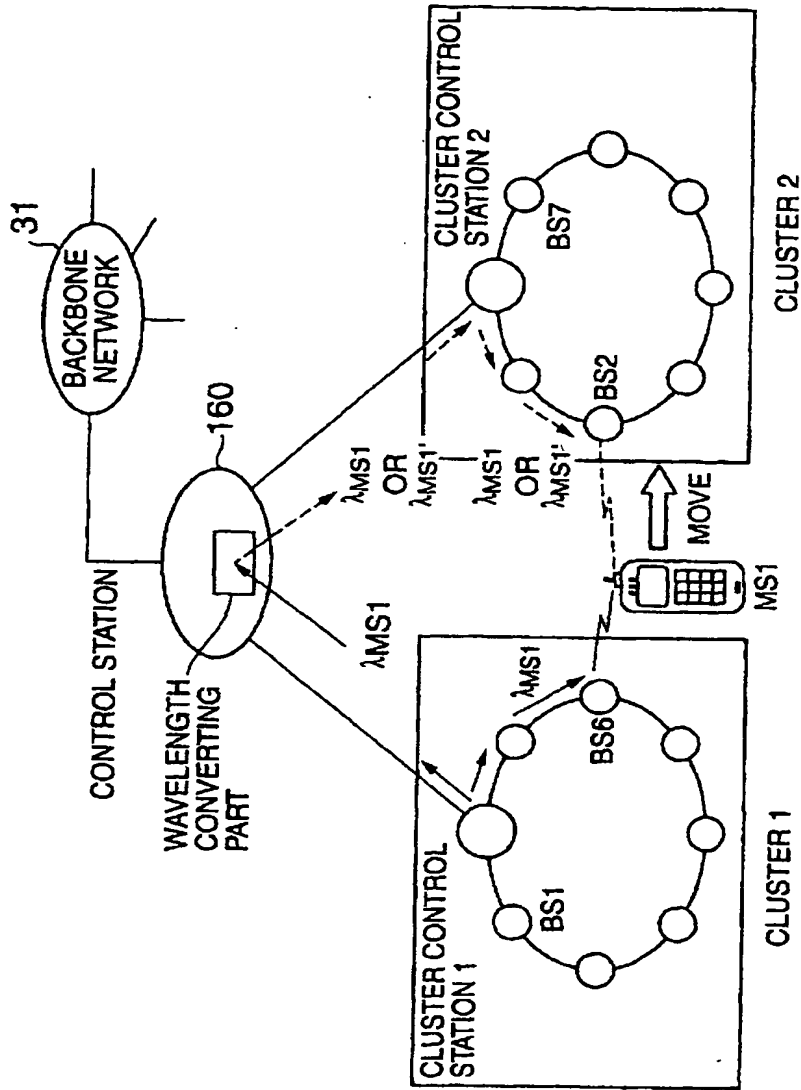


FIG.14

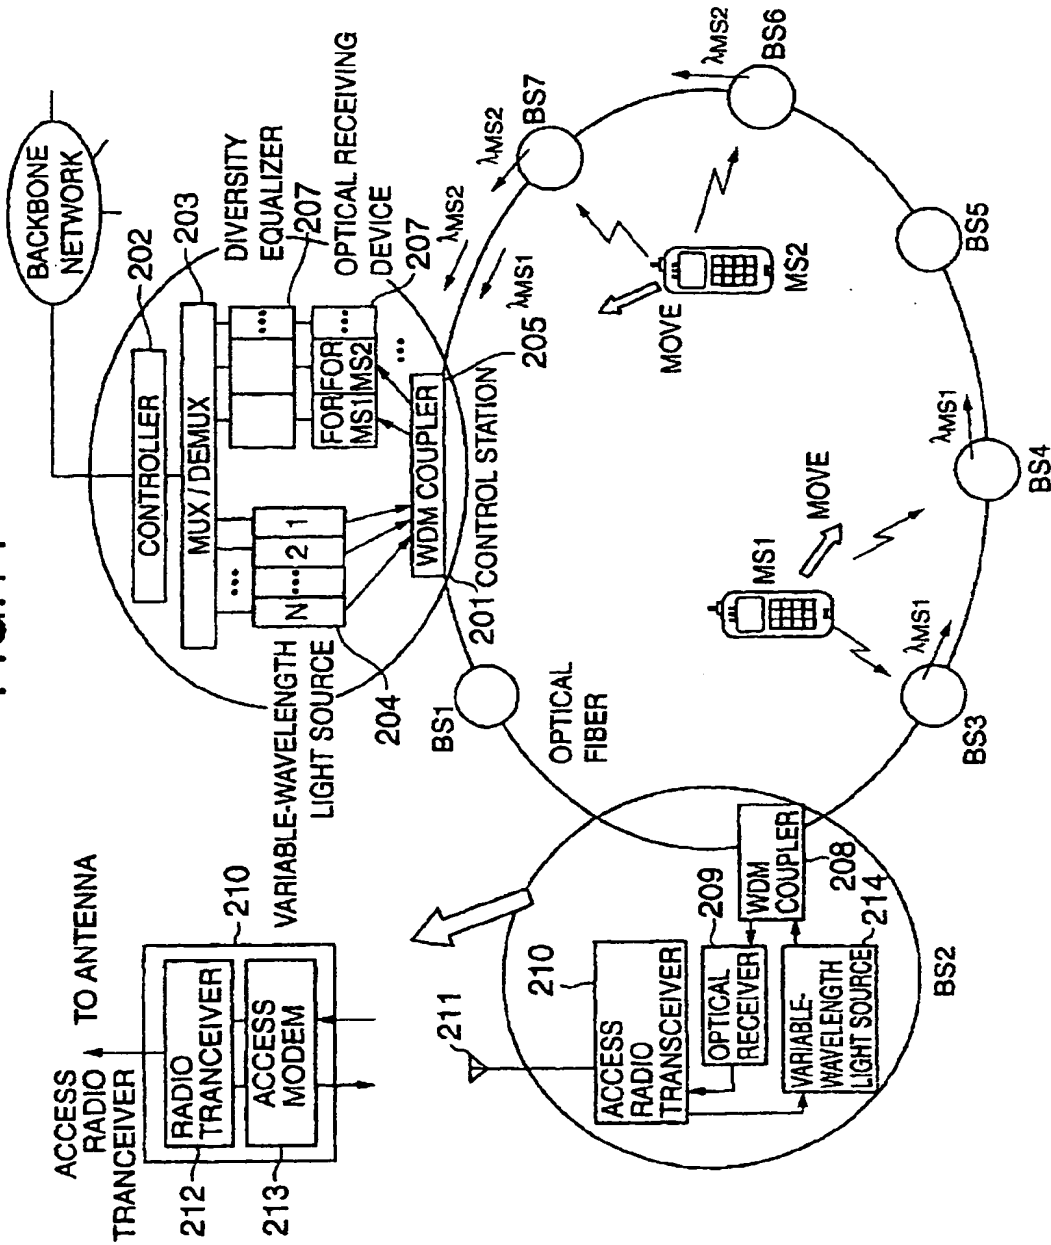


FIG.15

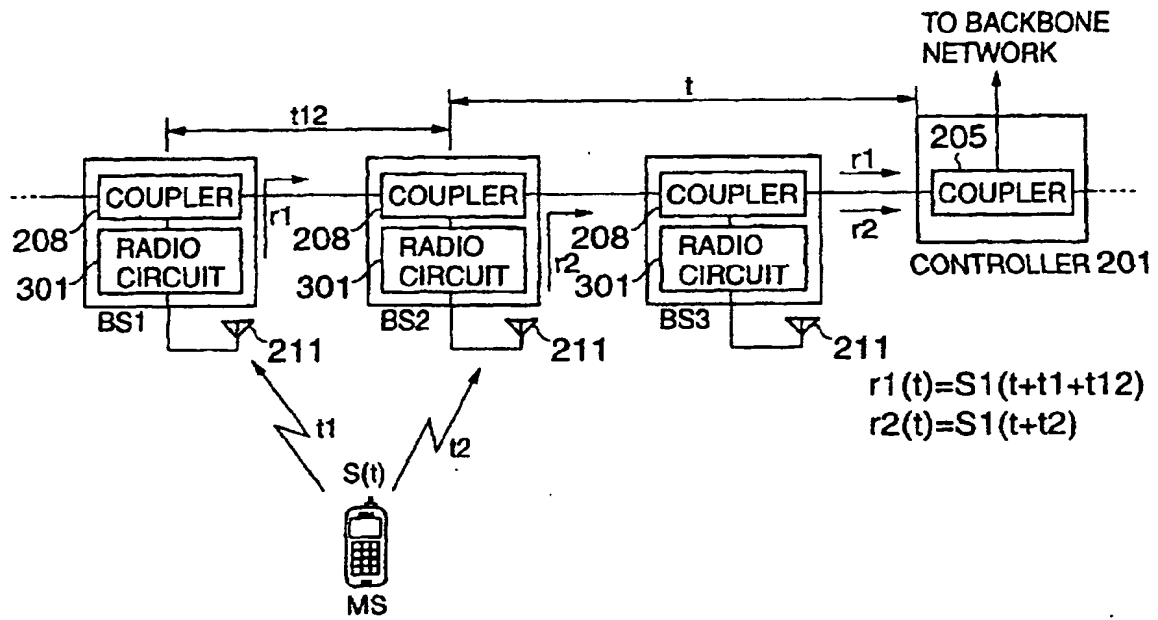


FIG. 16

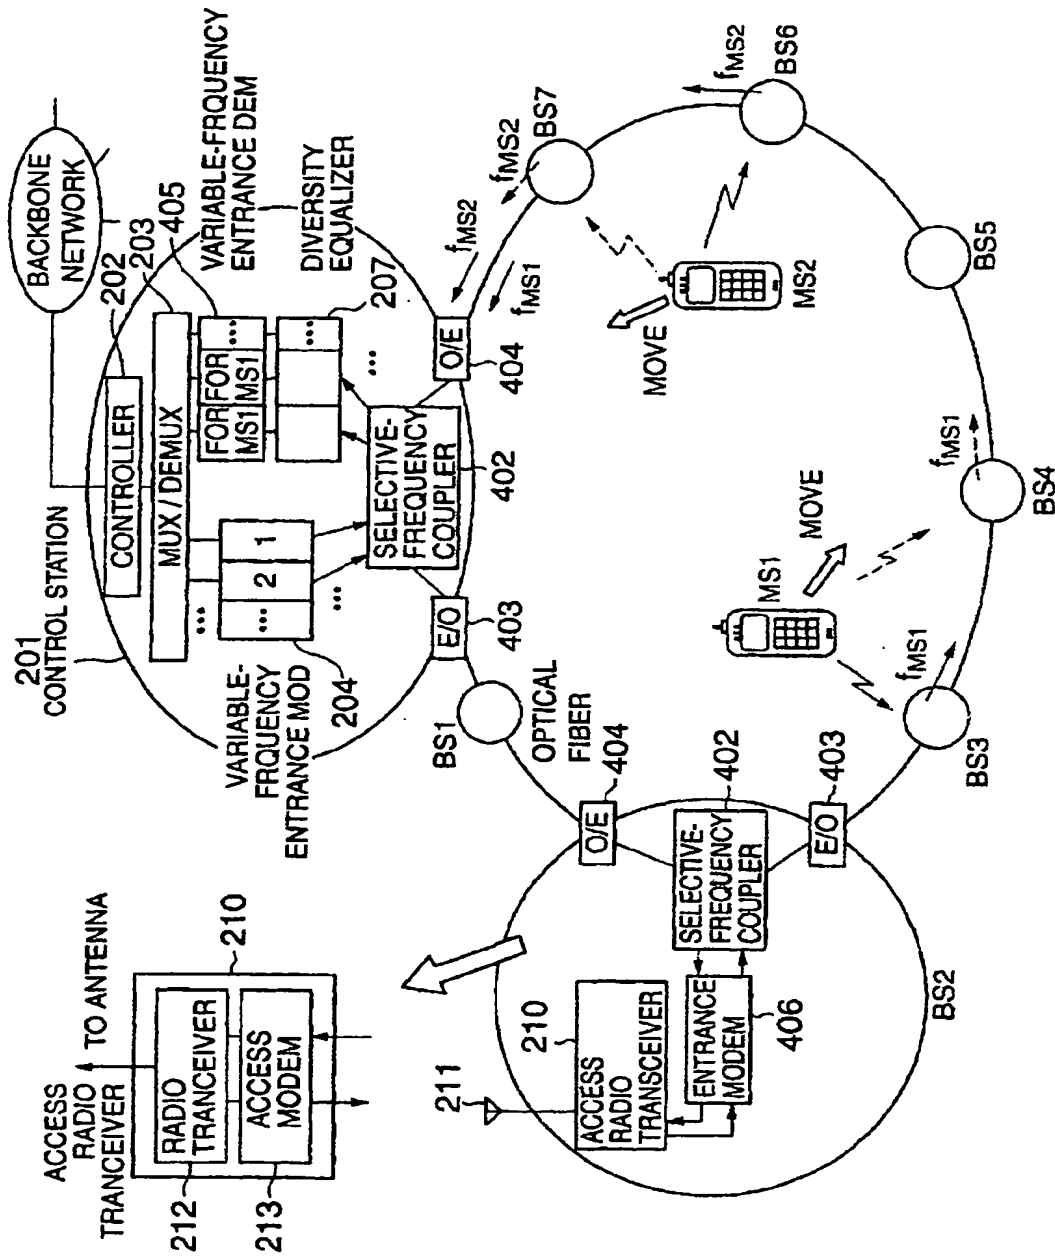


FIG. 17

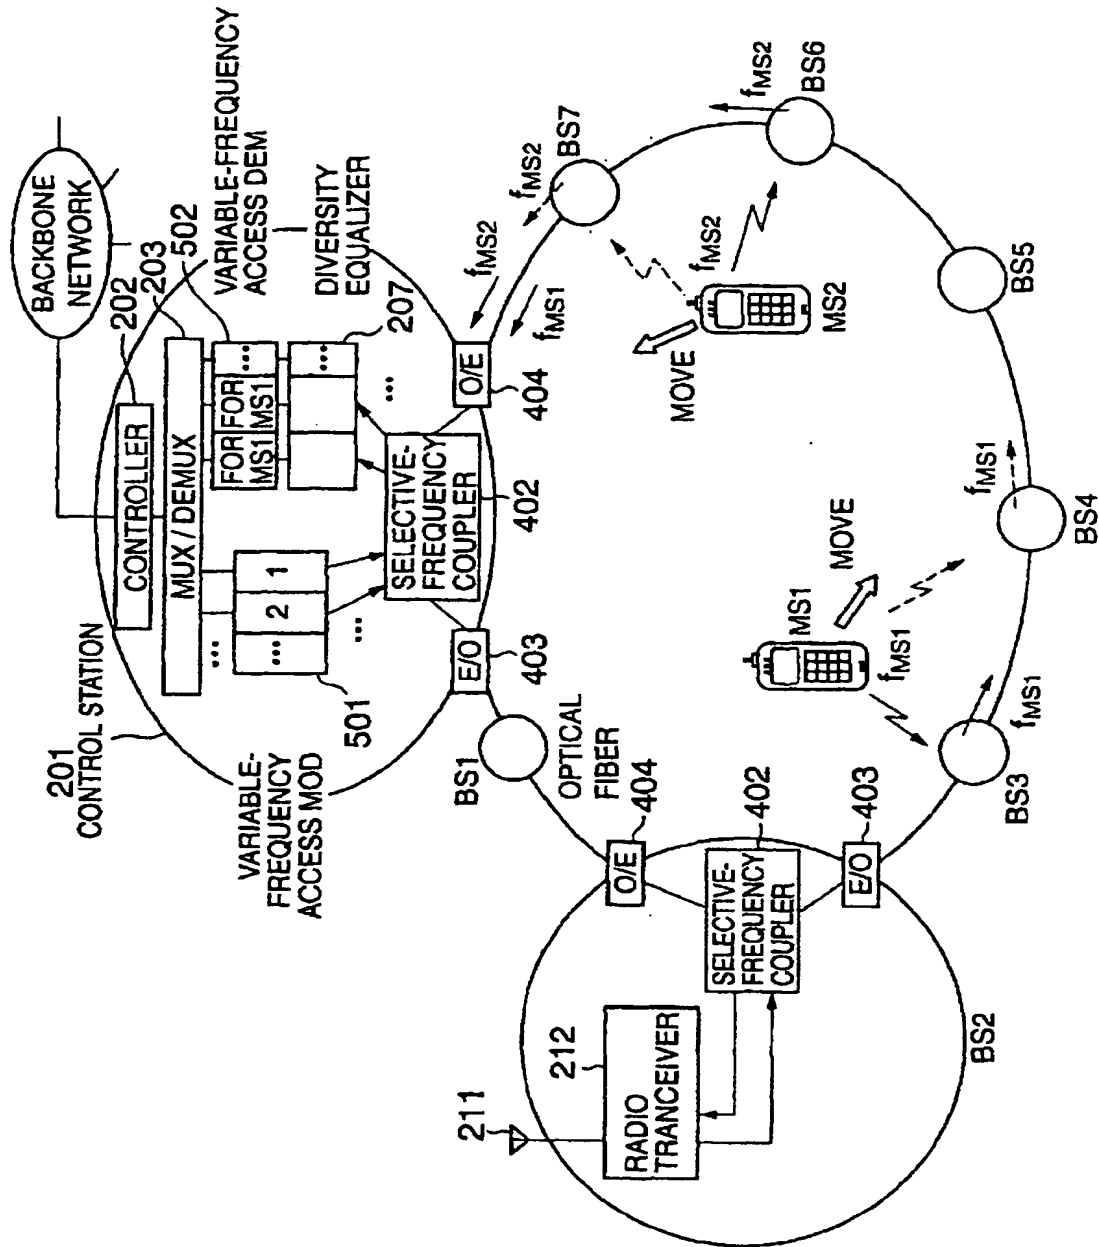


FIG.18


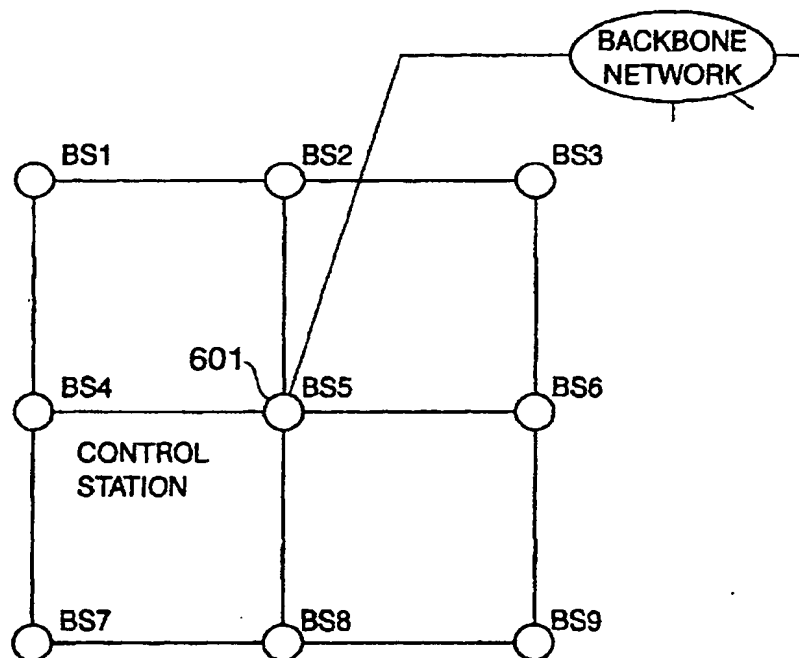


FIG.19

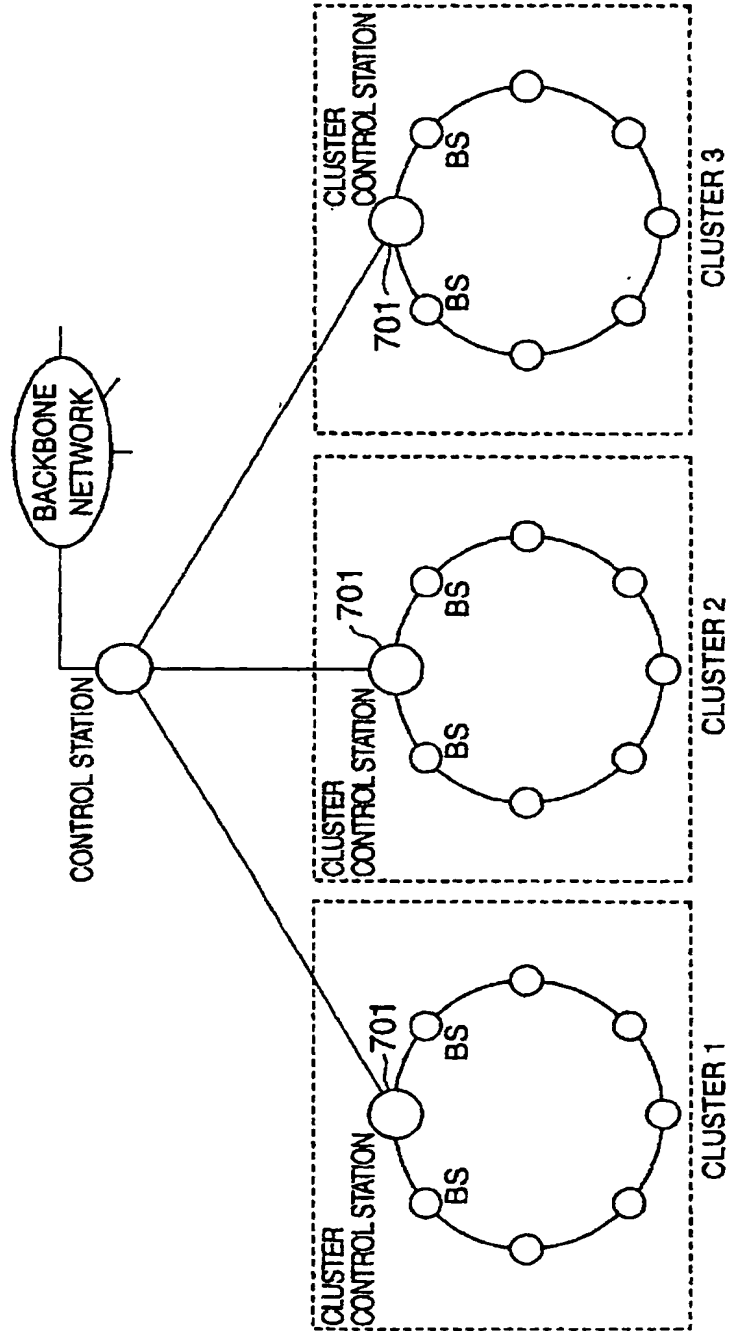

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/03845

A. CLASSIFICATION OF SUBJECT MATTER
Int. Cl.⁷ H04Q 7/24, H04J 14/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int. Cl.⁷ H04B 7/24-7/26, H04B 10/00-10/28, H04J 14/02, H04Q 7/00-7/38

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2001
Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 11-298939 A (Lucent Technologies, Inc.), 29 October, 1999 (29.10.99), Full text (Family: none)	1-30
A	CN 1224986 A (SK Telecom Co., Ltd.), 04 August, 1999 (04.08.99), Full text & JP 11-164348 A	1-30
A	HAN-CHIEH CHAO et al, "Channel assignment schemes for WDN-based personal communications network", WCNC. 1999, IEEE Wireless Communications and Networking Conference, (1999), Part Vol.2, ISBN 0780356683, pages 698 to 702	1-30

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
30 July, 2001 (30.07.01)

Date of mailing of the international search report
07 August, 2001 (07.08.01)

Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.